OKBRAND

FENCING PRODUCTS

PRODUCT GUIDE

Madill, Oklahoma

okbrand.com

EST. 1979

Madill, Oklahoma EST. 1979

OKBRAND

THE BRAND TO TRUST

Contact Information

Oklahoma Steel & Wire
1042 South 1st Street
Madill, Oklahoma 73446

1-800-654-4164
Phone: 580-795-7311
Fax: 580-795-7422

Iowa Steel & Wire
1500 West Van Buren
Centerville, Iowa 52544

1-800-325-5118
Phone: 641-954-4695
Fax: 641-437-1667

Buy American

www.okbrand.com

Table of Contents

Mission Statement, Product Standards 2
Fencing Knots, Welded Joints, Standard Wire Gauges 3
Max 50 Fence Panel 4-5
Bull Panels, Sheep & Goat Panels, Kennel Panels, Ranch Fence 6
Hog Panels 7
Utility Panels 8-9
Horse Panels 10-11
Barbed Wire 12-13
Barbless Wire 13
Field Fence 14-17
Max-Tight Field Fence 18-19
Max-Tight Horse Fence 20-21
Sheep and Goat Fence 22-23
Premium Game Fence 24-25
Max-Loc High-Tensile Fence 26-27
High-Tensile Barbed Wire and Field Fence 28-29
Max-Tight High-Tensile Sheep & Goat, Max-Tight High-Tensile Horse Fence 30-31
Welded Wire Fabric 32-33
Fence Stays 34-35
Electric Fence Wire 36-37
Catchweight Coils, Rebar Tie Wire 38-39
T-Post, T-Post Driver, T-Post Clip, Fence Staple, Pipe Clip, EZ Twist, Panel Hinge, Spreader Bar. 40-41
Baler Wire 42
Welded Wire Reinforcement 43
Fence Calculation Guide 44
Fence and Post Calculation Chart 45
Fencing Materials Information 46-47
Old Fashioned Guarantee, Installation Practices 48
Contact Information 49

Most products are available in special lengths or different galvanized coatings on request. We are continually adding new product lines and updating our current products. If you do not find the product you are looking for in this catalog, please call our knowledgeable and friendly sales staff, who will be glad to discuss preparing a custom order for you. We are committed to serving our customers regardless of what their wire needs might be.

Please note: All weights are approximate.

Our Mission

We are committed to providing the highest-quality products at the most competitive prices possible. We are driven to support our customers and the wire industry with unsurpassed standards of service and reliablility. With these goals and commitments, we maintain an environment that promotes long-term growth for our valued customers and the industry.

OK Brand Products are proudly made in the United States of America.

Our Product Standards

Premium

OK Brand Premium Fencing products are made to meet or exceed the highest standards in the industry which include all ASTM specifications. From the zinc coating weight to the wire tensile, every stage is monitored to provide the best fencing product on the market today and is the staple of OK Brand fencing quality.

OK Brand Premium Products marked with the ASTM logo indicate that the product is manufactured to meet or exceed the highest industry standards. All OK Brand Products are of the highest quality; however, ASTM sets different standards for certain products. Products with the ASTM logo are capable of being certified by Oklahoma Steel and Wire/Iowa Steel and Wire; and will pass state and federal specification in accordance with ASTM specifications.

Select

Quality is the number one priority in all OK Brand Fencing Products. Our Select Fencing Products maintain that standard as well, standing up to the rigorous day-to-day use on working farms and ranches. Trimming up the edges without compromising quality makes the Select Products a mainstay of our fencing products.

With quality and durability being our focus, many select products possess some of the same features as our premium products, such as wire size or zinc coating weight. However, these products are not produced to meet ASTM specifications. Therefore, Oklahoma Steel and Wire/Iowa Steel and Wire make no claims to passing ASTM specification and will not certify the Select product as such.

Commercial

If your needs are quality as well as economy, OK Brand Commercial is the answer. A lighter gauge wire, along with a commerical galvanized coating may put OK Brand Commercial in a different class than the others. The quality and dependability allow it to carry the OK Brand name.

Commercial products pass our strict quality control testing and adhere to our high industry standards. However they will not meet ASTM standards and Oklahoma Steel and Wire/Iowa Steel and Wire will not certify Commercial products to meet the published standard.

Galvanized Before Welding

Before welding, wires are galvanized using the tight wipe system, which produces a smooth uniform finish. This eliminates sharp burrs or icicles, preventing undue injury to animals or people. Galvanizing before welding combines safety with dependable strength and lasting durability.

Versi-tail

An added feature to a variety of OK Brand Products is Versi-Tail, which is the addition of a 12" tail to the beginning of each roll and a 6" tail to each end. Versi-Tail allows for easier installation and eliminates the need to remove cross-wire staples providing enough wire for tying corners or splicing rolls. This feature is currently used on all Max-Tight and Max-Loc Products.

Fencing Knots

OK BRAND BUILDS QUALITY FENCING USING THREE TYPES OF KNOTS.



The ***OK Brand Hinge-Joint Knot*** has a joint that acts as a hinge, allowing the fence to spring back into shape and give under pressure. This knot allows for easy installation and provides strength and flexibility.

Fencing that uses the ***OK Brand Hinge-Joint Knot*** are our Field Fence, Sheep and Goat Fence, and Game Fence.

The OK Brand Max-Tight Knot is a square knot that gives extra vertical strength to withstand impact by large animals. It also allows flexibility when installing over hilly terrain. This knot is used in our Max-Tight Horse Fence and Field Fence Products.

The ***OK Brand Max-Loc Knot*** uses fixed knot technology, originally developed in New Zealand for raising deer. This technology introduces a third wire to tie the continuous vertical and horizontal wires together. The fixed knot gives you maximum hold on the vertical and horizontal wires. This design securely locks the line wire and stay wires together, giving you the strength you need. Vertical stay wires are one piece and cannot unwind under pressure. Inherent flexibility of this design allows the fence to conform to terrain.

Welded Joints

OK Brand galvanizes all wire before welding, which provides a smooth finish on each line wire and eliminates sharp burrs. The wire is welded to form squares or rectangles - vertical or horizontal. Welded joints are used on:

- Utility Panels
- Cattle Panels
- Goat Panels
- Ranch Panels
- Horse Panels
- Sheep Panels
- Bull Panel
- Welded Wire Fabric

Standard Wire Gauges

OK Brand offers fencing in various gauges, from heavy-duty to lightweight. The higher the the number, the smaller the wire. See diagram below for the size of each gauge.

Please note: All product weights are approximate.

WIRE GAUGES DIAGRAM

Max 50 Fence Panels

OK Brand Max 50 Fence Panels are built to handle the roughest ranching conditions, but versatile enough to be used for lawn and garden projects.

•1/4 Panel is the heaviest in our fence panel line. Providing you a heavy galvanized line and cross wire to meet your need.

•4 Gauge Panel offers you a durable, economical fence panel solution.

•Select Cattle Panel utilizes a combination of a 5-gauge horizontal wire, a 4-gauge vertical wire, and the galvanized-before-welding process.

•Economy Cattle Panel keeps our same proven spacing combined with a lighter more economic line wire and cross wire, while still providing a durable product for your fencing needs.

•Handy Panel offers an easy to handle 8' version of our Economy.

MAX 50 FENCE PANELS - 1/4"

PRODUCT	LINE WIRE	PANEL HEIGHT	PANEL LENGTH	HORIZONTAL WIRE SPACING	VERTICAL WIRE SPACING	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
Max 50" Combination 13 Line	13	50"	16'	3-2" 2-3" 2-4" 5-6"	8"	52	50
Max 50" 11 Line	11	50"	16'	5-4" 5-6"	8"	45	50
Max 50" 10 Line	10	50"	16'	2-4" 7-6"	8"	44	50

MAX 50 FENCE PANELS - 4-GAUGE

PRODUCT	LINE WIRE	PANEL HEIGHT	PANEL LENGTH	HORIZONTAL WIRE SPACING	VERTICAL WIRE SPACING	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
Max 50" Combination 13 Line	13	50"	16'	3-2" 2-3" 2-4" 5-6"	8"	42	50
Max 50" 10 Line	10	50"	16'	2-4" 7-6"	8"	35	50

MAX 50 FENCE PANELS - SELECT

PRODUCT	LINE WIRE	PANEL HEIGHT	PANEL LENGTH	HORIZONTAL WIRE SPACING	VERTICAL WIRE SPACING	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
Select 13 Line	13	50"	16'	3-2" 2-3" 2-4" 5-6"	8"	37	50
Select Cattle Panel	10	50"	16'	2-4" 7-6"	8"	32	50

Max 50 Fence Panels

FENCE PANEL SPACING CONFIGURATIONS

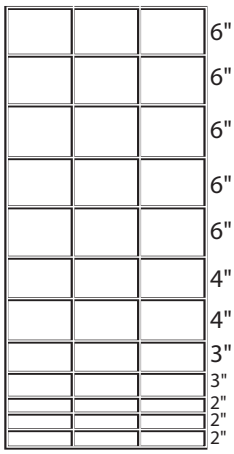

Max 50
Combo 13 Line

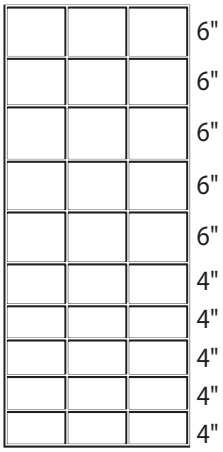

Max 50-11

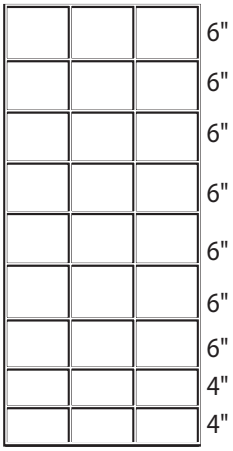

Max 50-10

MAX 50 FENCE PANELS - 1/4"

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567005623	0056-2	Max 50" Combination 13 Line	52	50
30755567006217	0062-1	Max 50" 11 Line	45	50
30755567005920	0059-2	Max 50" 10 Line	44	50

MAX 50 FENCE PANELS - 4-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567005678	0056-7	Max 50" Combination 13 Line	42	50
30755567005975	0059-7	Max 50" 10 Line	35	50

MAX 50 FENCE PANELS - SELECT

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567005647	0056-4	Select 13 Line 50"x16'	37	50
30755567006002	0060-0	Select Cattle Panel 50"x16'	32	50

Bull Panels

When your challenge is the most unruly of bulls, OK Brand has the solution. Our Bull Panel is the heaviest panel we manufacture. Manufactured with our galvanized-before-welding process, the 5′ x 16′ panel combines a 6″ x 6″ spacing and a 1-gauge galvanized wire. The 5′ height, reduces the likelihood of the animal going over the top, while the heavy gauge wire and 6″ spacing prevents them from going through the middle. The 16′ lengths allow for even post placement at 8′ which increases the strength of the confinement area. This panel is built with one thing in mind: keeping your bull where you put him!

Sheep And Goat Panels

Building pens for those prized show sheep or building a perimeter fence to hold in a herd of goats, OK Brand Sheep and Goat Panels are the choice for you. With spacing at the bottom starting at 3″ x 8″ graduating up to spacing at the top of 6″ x 8″, this panel gives you 42″ of total durability. This Select panel stands up to everyday use and the galvanized-before-welding process eliminates sharp burrs that may cause injury to your show animal.



Sheep & Goat

Kennel Panels

Keeping up with your most trusted four-legged friend can sometimes be challenging. Helping you to meet this demand, OK Brand offers you an 8-gauge galvanized-before-welding Kennel Panel. Manufactured at a height of 6′ to contain even the most feisty canine with a 12′ length to accommodate most standard kennel configurations.

Ranch Fence

Perhaps the most economical yet durable fencing is our OK Brand Ranch Fence, which is ideal for almost any fencing project. This 5′ x 100′ roll has a 6-gauge galvanized wire to provide the strength you need to meet all your challenges.

SPECIALTY FENCING

PRODUCT	PANEL HEIGHT	SPACING	PANEL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
Bull Panel 1-Ga.	60″	6″ x 6″	16′	82	25
Select Sheep & Goat.	42″	4-3″ 2-4″ 2-5″ 2-6″	16′	32	50
Ranch Fence 6-Ga.	60″	6″ x 6″	100′	205	4
Kennel Panel 8-Ga.	72″	4″ x 2″	12′	47	25

Hog Panels

OK Brand Hog Panels are built to handle the toughest ranching conditions, but versatile enough to be used for lawn and garden projects. Every panel carries the same quality and workmanship you expect from all OK Brand fencing products. They are manufactured with our galvanized-before-welding process, which allows for a smooth, uniform finish and prevents undue injury to you or your animals. Graduated spacing from top to bottom helps eliminate rooting, keeping your prized hog in and predators out.



Hog 34-11

HOG PANELS - 1/4"						
PRODUCT			HORIZONTAL WIRE SPACING	VERTICAL WIRE SPACING		PANELS PER BUNDLE
Hog 34" 11 Line	11	16'	4-2" 2-3"1-4" 2-5" 1-6"	8"	42	50

HOG PANELS - 4-GAUGE						
PRODUCT			HORIZONTAL WIRE SPACING	VERTICAL WIRE SPACING		PANELS PER BUNDLE
Hog 34" 11 Line	11	16'	4-2" 2-3" 1-4" 2-5" 1-6"	8"	34	50

HOG PANELS - SELECT						
PRODUCT			HORIZONTAL WIRE SPACING	VERTICAL WIRE SPACING		PANELS PER BUNDLE
Select Hog 11 Line	11	16'	4-2" 2-3" 1-4" 2-5" 1-6"	8"	29	50

HOG PANELS - 1/4"				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567005807	0058--0	Hog 34" 11 Line	42	50

HOG PANELS - 4-GAUGE				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567005852	0058-5	Hog 34" 11 Line	34	50

HOG PANELS - SELECT				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567005845	0058-4	Select Hog 11 Line"	29	50

SPECIALTY FENCING				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567006552	0065-5	Bull Panel 1-Ga.	82	25
30755567007108	0071-0	Select Sheep & Goat.	32	50
30755567220002	2200-0	Ranch Fence 6-Ga.	205	4
30755567008303	0083-0	Kennel Panel 8-Ga.	47	25

Utility Panels

No matter what your animal containment needs are, OK Brand has the solution. A wide variety of spacing configurations, along with several lengths in either 4-gauge or 6-gauge, makes these panels extremely versatile for many applications.

UTILITY PANELS - 4-GAUGE

PRODUCT	PANEL HEIGHT	SPACING	PANEL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
4′ x 16′	48″	4″ x 4″	16′	55	50	
4′ x 20′	48″	4″ x 4″	20′	68	50	
5′ x 16′	60″	4″ x 4″	16′	68	50	
5′ x 20′	60″	4″ x 4″	20′	85	50	
6′ x 20′	72″	4″ x 4″	20′	101	50	
5′ x 20′	60″	4″ x 8″	20′	64	50	
4′ x 20′	48″	6″ x 6″	20′	46	50	
5′ x 20′	60″	6″ x 6″	20′	58	50	
6′ x 20′	72″	6″ x 6″	20′	69	50	

UTILITY PANELS - 6-GAUGE

PRODUCT	PANEL HEIGHT	SPACING	PANEL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
3′ x 16′	36″	4″ x 4″	16′	30	50	
3′ x 20′	36″	4″ x 4″	20′	38	50	
4′ x 16′	48″	4″ x 4″	16′	40	50	
4′ x 20′	48″	4″ x 4″	20′	50	50	
5′ x 12′	60″	4″ x 4″	12′	37	50	
5′ x 16′	60″	4″ x 4″	16′	49	50	
5′ x 20′	60″	4″ x 4″	20′	62	50	
6′ x 20′	72″	4″ x 4″	20′	74	50	
8′ x 16′	96″	4″ x 4″	16′	79	50	
8′ x 20′	96″	4″ x 4″	20′	95	25	

2X2 UTILITY PANELS - 6-GAUGE

PRODUCT	PANEL HEIGHT	SPACING	PANEL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
4′ x 12′	48″	2″ x 2″	12′	57	25	
4′ x 16′	48″	2″ x 2″	16′	75	25	
5′ x 12′	60″	2″ x 2″	12′	71	25	
5′ x 16′	60″	2″ x 2″	16′	93	25	

Wire Panel Style Numbers

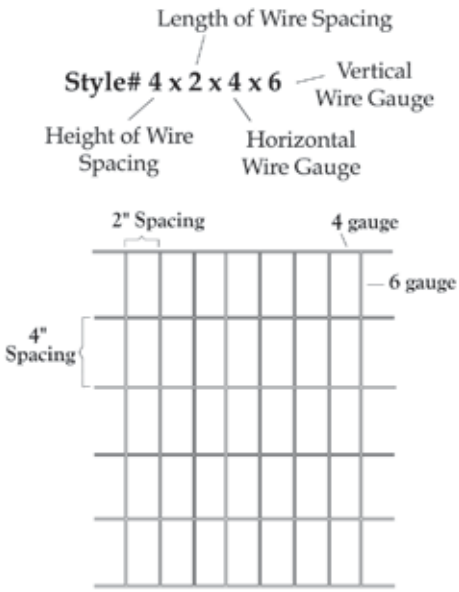

UTILITY PANELS - 4-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS	PANELS PER BUNDLE
30755567124003	1240-0	4′ x 16′	55	50
30755567125000	1250-0	4′ x 20′	68	50
30755567128001	1280-0	5′ x 16′	68	50
30755567129008	1290-0	5′ x 20′	85	50
30755567131001	1310-0	6′ x 20′	101	50
30755567199001	1990-0	5′ x 20′	64	50
30755567210003	2100-0	4′ x 20′	46	50
30755567212007	2120-0	5′ x 20′	58	50
30755567214001	2140-0	6′ x 20′	69	50

UTILITY PANELS - 6-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS	PANELS PER BUNDLE
30755567169967	1699-6	3′ x 16′	30	50
30755567174008	1700-0	3′ x 20′	38	50
30755567170000	1740-0	4′ x 16′	40	50
30755567175005	1750-0	4′ x 20′	50	50
30755567176002	1760-0	5′ x 12′	37	50
30755567177009	1770-0	5′ x 16′	49	50
30755567178006	1780-0	5′ x 20′	62	50
30755567179003	1790-0	6′ x 20′	74	50
30755536182003	1820-0	8′ x 16′	79	25
30755567184014	1840-1	8′ x 20′	95	25
30755567219006	2190-0	5′ x 20′	42	50

2X2 UTILITY PANELS - 6-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS	PANELS PER BUNDLE
	0893-95	4' x 12'	57	25
30755567089401	0894-0	4' x 16'	75	25
	0894-05	5' x 12'	71	25
30755567089418	0894-1	5' x 16'	93	25

Horse Panels

When the safety of your horses is important, OK Brand has the panel for you. These OK Brand horse panels offer safety features that will meet your expectations and provide dependable strength and lasting durability. Sharp burrs and edges are eliminated with our galvanized-before-welding process. This process allows for a smooth, uniform finish on the panels to prevent undue injury to your prized animal. The 4″ x 2″ wire spacing keeps the animal confined to its intended space and keeps unwanted animals or predators out. The tight spacing helps reduce the possibility of injury due to pawing or reaching through the fence. This fencing is available in a variety of lengths and heights in either 4-gauge or 6-gauge. Specifically designed for safety, OK Brand Horse Panels have a variety of uses, which include dividing a stall, fencing a pasture, or constructing a dog pen.

HORSE PANELS - 4-GAUGE

PRODUCT	PANEL HEIGHT	SPACING	PANEL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
4′ x 12′	48″	4″ x 2″	12′	60	25	
4′ x 16′	48″	4″ x 2″	16′	80	25	
4′ x 20′	48″	4″ x 2″	20′	100	25	
5′ x 12′	60″	4″ x 2″	12′	75	25	
5′ x 16′	60″	4″ x 2″	16′	100	25	
5′ x 20′	60″	4″ x 2″	20′	125	25	

HORSE PANELS - 6-GAUGE

PRODUCT	PANEL HEIGHT	SPACING	PANEL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
4′ x 12′	48″	4″ x 2″	12′	44	25	
4′ x 16′	48″	4″ x 2″	16′	60	25	
4′ x 20′	48″	4″ x 2″	20′	74	25	
5′ x 12′	60″	4″ x 2″	12′	55	25	
5′ x 16′	60″	4″ x 2″	16′	74	25	
5′ x 20′	60″	4″ x 2″	20′	92	25	
6′ x 16′	72″	4″ x 2″	16′	88	25	
6′ x 20′	72″	4″ x 2″	20′	110	25	
68″ x 24′	68″	4″ x 2″	24′	125	25	

Horse Panels

HORSE PANELS - 4-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567007504	0075-0	4′ x 12′	60	25
30755567007603	0076-0	4′ x 16′	80	25
30755567007702	0077-0	4′ x 20′	100	25
30755567007801	0078-0	5′ x 12′	75	25
30755567007900	0079-0	5′ x 16′	100	25
30755567008006	0080-0	5′ x 20′	125	25

HORSE PANELS - 6-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	PANELS PER BUNDLE
30755567007559	0075-5	4′ x 12′	44	25
30755567007658	0076-5	4′ x 16′	60	25
30755567007757	0077-5	4′ x 20′	74	25
30755567007856	0078-5	5′ x 12′	55	25
30755567007955	0079-5	5′ x 16′	74	25
30755567008051	0080-5	5′ x 20′	92	25
30755567008259	0082-5	6′ x 16′	88	25
30755567008150	0081-5	6′ x 20′	110	25
30755567100007	1000-0	68″ x 24′	125	25

Barbed Wire

Whether it's our 2-point or 4-point barbed wire, the durability and strength will impress every user of our wire. We have some of the sharpest barbs in the industry, repelling the most stubborn of animals. All OK Brand Barbed Wire styles have a Class I coating that meets or exceeds ASTM A-121 specifications with sharp, evenly spaced barbs. OK Brand Western Edition offers the same qualities as our Premium Barbed Wire with the feature of flat barbs. Our OK Brand Select and Texas Edition Flat Barb give you the Class I coating, but lessens the expense by spreading the barbs by 1". OK Brand Premium and Select Barbed Wire have zero splices per roll with minimum 950 lb. breaking strength. Our OK Brand commercial Barbed Wire is economically priced using commercial galvanized coating. All styles are packaged on non-collapsible reels with easy handle, placed on wooden pallets, and tarpped for protection against the elements.

OK Brand barbed wire products come with an easy handle. This handle collapses inside the spool when the wire is stacked. To use, you simply pick up the handle and it securely hooks the spool when you are ready to lift the product.

BARBED WIRE - 2-POINT

PRODUCT	ZINC COATING	BARB SPACING	STRAND WIRE GAUGE	ROLL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
2-Pt. Premium	Class III	4"	12.5	1,320'	84	27	
2-Pt. Premium	Class I	4"	12.5	1,320'	80	27	
2-Pt. Select	Class I	5"	12.5	1,320'	74	27	
2-Pt. Choice	Class I	4"	13.5	1,320'	68	27	

FLAT BARB - BARBED WIRE - 2-POINT

PRODUCT	ZINC COATING	BARB SPACING	STRAND WIRE GAUGE	ROLL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
Western Edition	Class I	4"	12.5	1320'	82	27	
Texas Edition	Class I	5"	12.5	1320'	74	27	

BARBED WIRE - 4-POINT

PRODUCT	ZINC COATING	BARB SPACING	STRAND WIRE GAUGE	ROLL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
4-Pt. Premium	Class III	5"	12.5	1,320'	91	27	
4-Pt. Premium	Class I	5"	12.5	1,320'	88	27	
4-Pt. Select	Class I	6"	12.5	1,320'	80	27	
4-Pt. Choice	Class I	5"	13.5	1,320'	72	27	

Barbless Wire

Looking for something to do the job without the severity of barbed wire? OK Brand Barbless Wire has a variety of uses, from fencing a pasture full of horses to putting a tension wire at the bottom of our Field Fence. Barbless Wire is designed to contain thinner-skinned animals that do not need the extra persuasion you get from our barbed products. OK Brand Barbless Wire is manufactured with a Class I coating that meets or exceeds ASTM A-121 specifications.

BARBLESS WIRE

PRODUCT	ZINC COATING	STRAND WIRE GAUGE	ROLL LENGTH	APPROX. WEIGHT LBS.	PANELS PER BUNDLE	TAG COLOR
Barbless Premium	Class III	12.5	1,320'	72	32	
Barbless Premium	Class I	12.5	1,320'	68	32	
Barbless Light Duty	Commercial	14	1,320'	45	32	

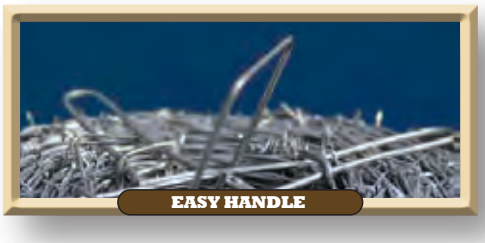

BARBED WIRE - 2-POINT

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567010053	0100-5	2-Pt. Premium Class III	84	27
755567010008	0100-0	2-Pt. Premium	80	27
755567010107	0101-0	2-Pt. Select	74	27
755567010305	0103-0	2-Pt. Choice	68	27

FLAT BARB - BARBED WIRE - 2-POINT

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567010060	0100-6	2-Pt. Western Edition	82	27
755567010077	0100-7	2-Pt. Texas Edition	74	27

BARBED WIRE - 4-POINT

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567010558	0105-5	4-Pt. Premium Class III	91	27
755567010503	0105-0	4-Pt. Premium	88	27
755567010602	0106-0	4-Pt. Select	80	27
755567010701	0107-0	4-Pt. Choice	72	27

BARBLESS WIRE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567011029	0110-2	Barbless Premium Class III	72	32
755567011050	0110-5	Barbless Premium	68	32
755567011104	0111-0	Barbless Light Duty	45	32

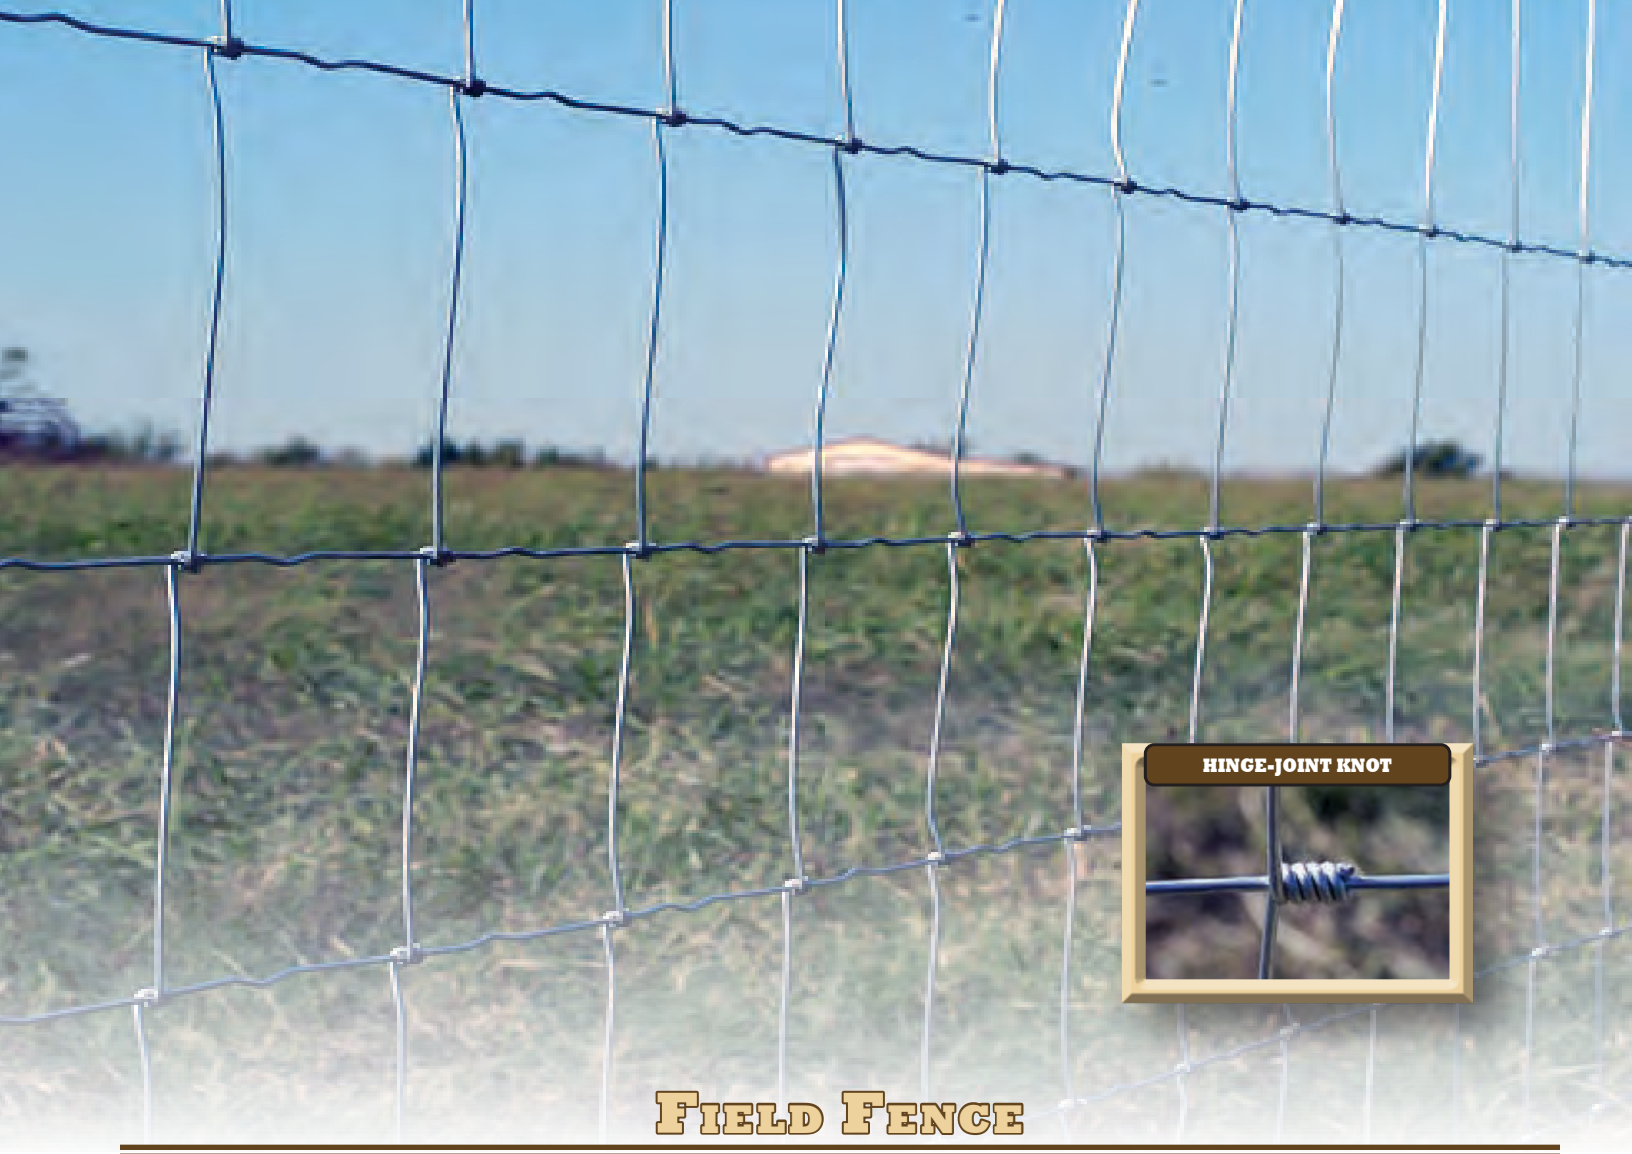

Field Fence

OK Brand Field Fence (woven wire) is manufactured in a wide variety of heights and styles and features a graduated spacing that starts with small openings at the bottom, helping to prevent entry by small animals. The Hinge-Joint Knot allows the fencing to give under pressure and spring back into shape. It also expands or contracts under changing weather, giving flexibility and added strength. This quality fencing ensures a solid construction over any terrain. Our field fence is designed using a variety of spacing configurations to accommodate horses, cattle, hogs, and other large animals.

- ***OK Brand Premium Field Fence*** is produced with a Class I or Class III zinc coating in 9, 11, and 12.5-gauge. Heights range from 26″ to 56″, with a stay opening of either 6″ or 12″ and a length of 330′ (20 rods). Uniform strength provides the best stretching possible and the range of sizes will meet all your fencing needs.
- ***OK Brand Select Field Fence*** offers the same tensile requirements as our Premium Fence. It uses a commercial zinc coating and comes in 330′ rolls. This quality field fence is a great value for your fencing needs.

Field Fence

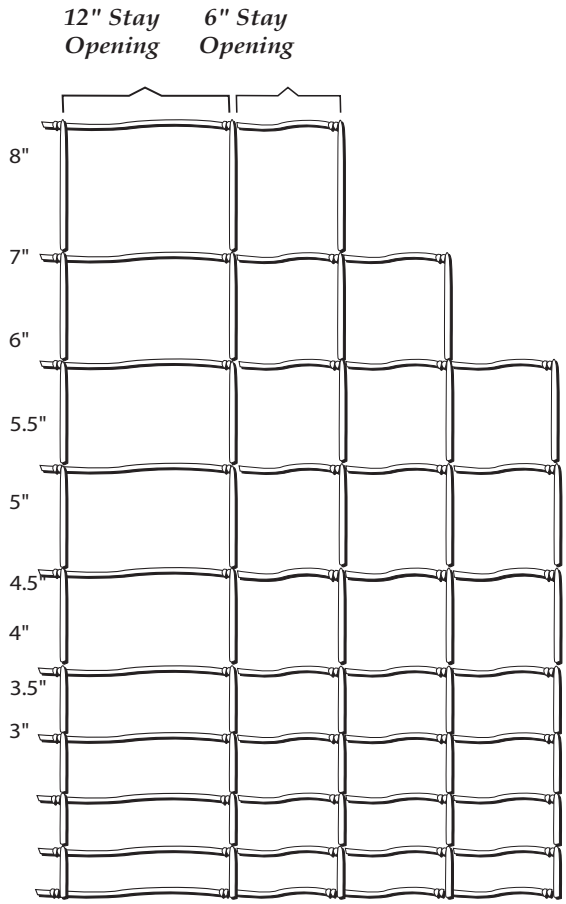

Fence Style Numbers

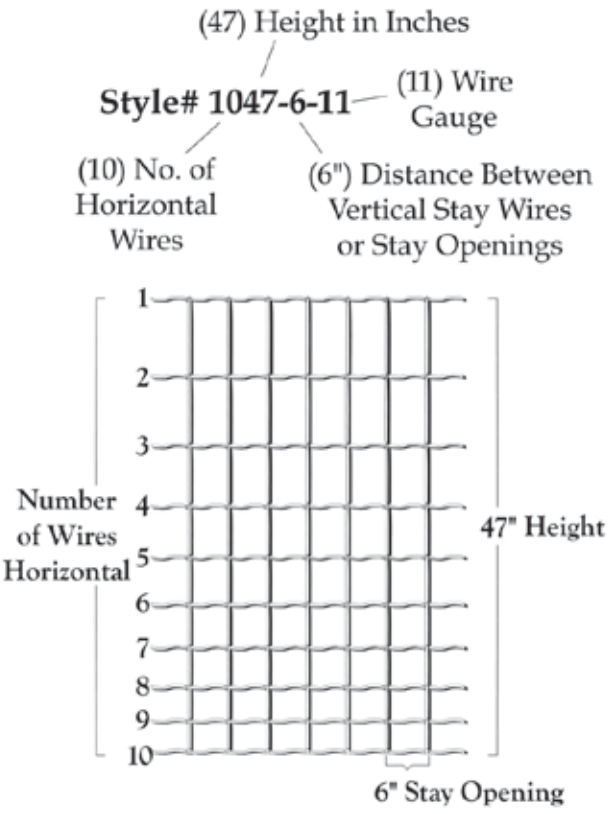

PREMIUM HINGE-JOINT FIELD FENCE - CLASS I ZINC COATING OR CLASS III ZINC COATING

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR	STOCK ITEM
939-6-9	9	39″	6″	9	9	330′	356	4		
1047-6-9	10	47″	6″	9	9	330′	408	4		*
1154-6-9	11	54″	6″	9	9	330′	456	4		
939-12-9	9	39″	12″	9	9	330′	264	6		
1047-12-9	10	47″	12″	9	9	330′	298	6		*
1154-12-9	11	54″	12″	9	9	330′	333	6		
726-6-11	7	26″	6″	11	9	330′	182	6		
832-6-11	8	32″	6″	11	9	330′	212	6		
939-6-11	9	39″	6″	11	9	330′	244	6		*
1047-6-11	10	47″	6″	11	9	330′	278	6		*
1156-6-11	11	56″	6″	11	9	330′	313	6		*
939-12-11	9	39″	12″	11	9	330′	184	9		
1047-12-11	10	47″	12″	11	9	330′	208	9		*
1156-12-11	11	56″	12″	11	9	330′	232	9		
726-6-12.5	7	26″	6″	12.5	10	330′	130	9		*
832-6-12.5	8	32″	6″	12.5	10	330′	150	9		*
939-6-12.5	9	39″	6″	12.5	10	330′	170	9		*
1047-6-12.5	10	47″	6″	12.5	10	330′	190	9		*
1156-6-12.5	11	56″	6″	12.5	10	330′	220	9		*
726-12-12.5	7	26″	12″	12.5	10	330′	104	9		
832-12-12.5	8	32″	12″	12.5	10	330′	116	9		*
939-12-12.5	9	39″	12″	12.5	10	330′	132	9		*
1047-12-12.5	10	47″	12″	12.5	10	330′	146	9		*
1156-12-12.5	11	56″	12″	12.5	10	330′	160	9		

SELECT HINGE-JOINT FIELD FENCE - COMMERCIAL ZINC COATING

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR	STOCK ITEM
726-6-12.5	7	26″	6″	12.5	10	330′	123	9		*
832-6-12.5	8	32″	6″	12.5	10	330′	142	9		*
939-6-12.5	9	39″	6″	12.5	10	330′	161	9		*
1047-6-12.5	10	47″	6″	12.5	10	330′	183	9		*
1156-6-12.5	11	56″	6″	12.5	10	330′	205	9		*

PREMIUM HINGE-JOINT FIELD FENCE - CLASS I ZINC COATING OR CLASS III ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567020687	0206-8	939-6-9	356	4
755567021905	0219-0	1047-6-9	408	4
755567021981	0219-8	1154-6-9	456	4
755567020892	0208-9	939-12-9	264	6
755567022001	0220-0	1047-12-9	298	6
755567022100	0221-0	1154-12-9	333	6
755567020052	0200-5	726-6-11	182	6
755567020458	0204-5	832-6-11	212	6
755567020755	0207-5	939-6-11	244	6
755567021158	0211-5	1047-6-11	278	6
755567022551	0225-5	1156-6-11	313	6
755567020953	0209-5	939-12-11	184	9
755567021356	0213-5	1047-12-11	208	9
755567022650	0226-5	1156-12-11	232	9
755567020151	0201-5	726-6-12.5	130	9
755567020557	0205-5	832-6-12.5	150	9
755567020854	0208-5	939-6-12.5	170	9
755567021257	0212-5	1047-6-12.5	190	9
755567022506	0225-0	1156-6-12.5	220	9
755567020359	0203-5	726-12-12.5	104	9
755567020656	0206-5	832-12-12.5	116	9
755567021059	0210-5	939-12-12.5	132	9
755567021455	0214-5	1047-12-12.5	146	9
755567022667	0226-6	1156-12-12.5	160	9

SELECT HINGE-JOINT FIELD FENCE - COMMERCIAL ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567020106	0201-0	726-6-12.5	123	9
755567020502	0205-0	832-6-12.5	142	9
755567020809	0208-0	939-6-12.5	161	9
755567021202	0212-0	1047-6-12.5	183	9
755567022407	0224-0	1156-6-12.5	205	9

Max-Tight Field Fence

OK Brand Max-Tight Field Fence is manufactured using the Max-Tight Knot. Just like our OK Brand Hinge Lock, it is manufactured in a wide selection of heights and styles. Max-Tight Field Fence features a graduated spacing that starts with small openings at the bottom which helps prevent entry from small animals. The Max-Tight knot provides extra vertical strength to withstand impact from large animals while flexible enough for installation over hilly terrain. Our field fence is designed using a variety of spacing configurations to accommodate horses, cattle, hogs, and other large animals.

As with all OK Brand Max-Tight products, our field fence has the added benefit of our unique "Versi-Tail" feature. This feature allows for easier installation by adding a 12" tail at the beginning of each roll and a 6" tail at each end. This feature eliminates the need to remove cross-wire staples to allow enough wire for tying corners or splicing rolls.

OK Brand Premium Max-Tight Field Fence is available in Class I or Class III Zinc Coating.

MAX-TIGHT FIELD FENCE - CLASS I OR CLASS III ZINC COATING

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	FILLER WIRE GA.	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
832-6-12.5	8	32"	6"	12.5	10	330'	143	8	
939-6-12.5	9	39"	6"	12.5	10	330'	163	8	
1047-6-12.5	10	47"	6"	12.5	10	330'	182	8	
1472-6-12.5	14	72"	6"	12.5	10	330'	261	6	

MAX-TIGHT FIELD FENCE - COASTAL CLASS III

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	FILLER WIRE GA.	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
1047-6-13	10	47"	6"	13	11	330'	146	8	

MAX-TIGHT FIELD FENCE - CLASS I OR CLASS III ZINC COATING				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567023701	0237-0	832-6-12.5	143	8
755567023602	0236-0	939-6-12.5	163	8
755567023503	0235-0	1047-6-12.5	182	8
755567023497	0234-9	1472-6-12.5	261	6

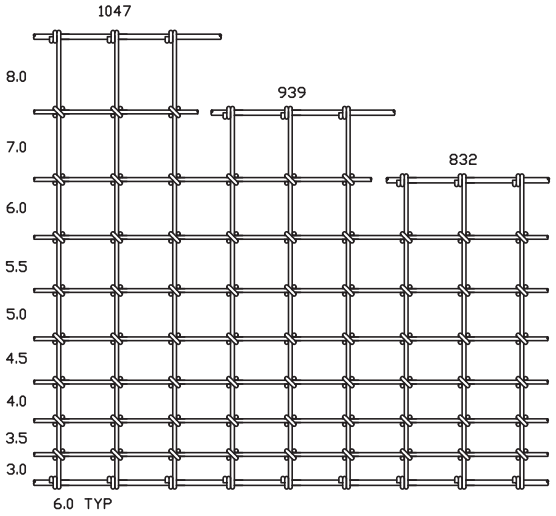

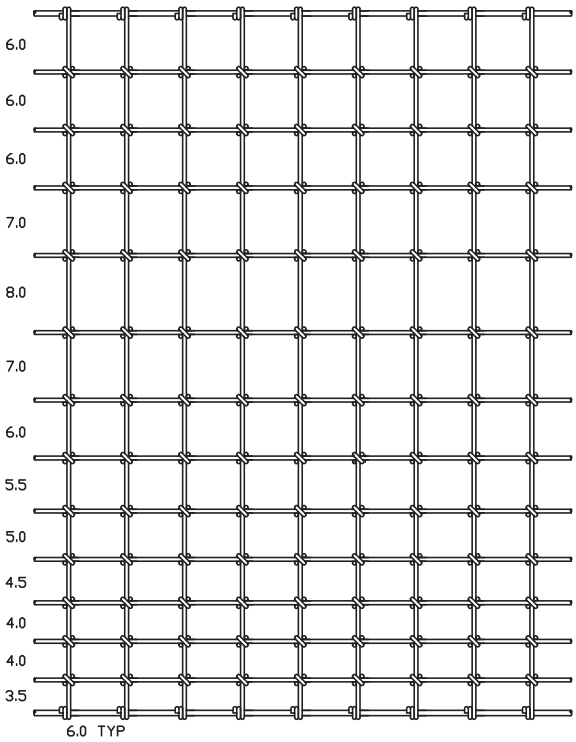

Max-Tight Horse Fence

Designed for the serious horseman, the Max-Tight Horse Fence is manufactured using the Max-Tight Horse Safe Knot. This square knot provides extra vertical strength to withstand impact from large animals. It also allows flexibility for installation on hilly terrain. A unique feature to Max-Tight Horse Fence is the Versi-Tail. This allows for easier splicing of rolls and anchoring to corners by adding a 12" tail at the beginning of each roll and a 6" tail at the end. Versi-Tail allows for faster installation by eliminating the need to remove cross-wire staples to allow enough tail for tying to corners or splicing rolls. Class I galvanized horse fence resists corrosion which results in a longer fence life. Continuous vertical and horizontal wires, wrapped in a horse-safe knot with a third wire, provides the strength and rigidity as well as the safety needed for your prized animals.

MAX-TIGHT HORSE FENCE - CLASS I OR CLASS III ZINC COATING

PRODUCT	FENCE HEIGHT	SPACING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
3′	36″	4″ x 2″	12.5	10	100′	94	8	
4′	48″	4″ x 2″	12.5	10	100′	122	8	
4′	48″	4″ x 2″	12.5	10	200′	244	4	
4′	48″	4″ x 2″	12.5	10	300′	348	3	
5′	60″	4″ x 2″	12.5	10	100′	151	8	
5′	60″	4″ x 2″	12.5	10	200′	296	4	
5′	60″	4″ x 2″	12.5	10	300′	428	3	
6′	72″	4″ x 2″	12.5	10	100′	179	8	

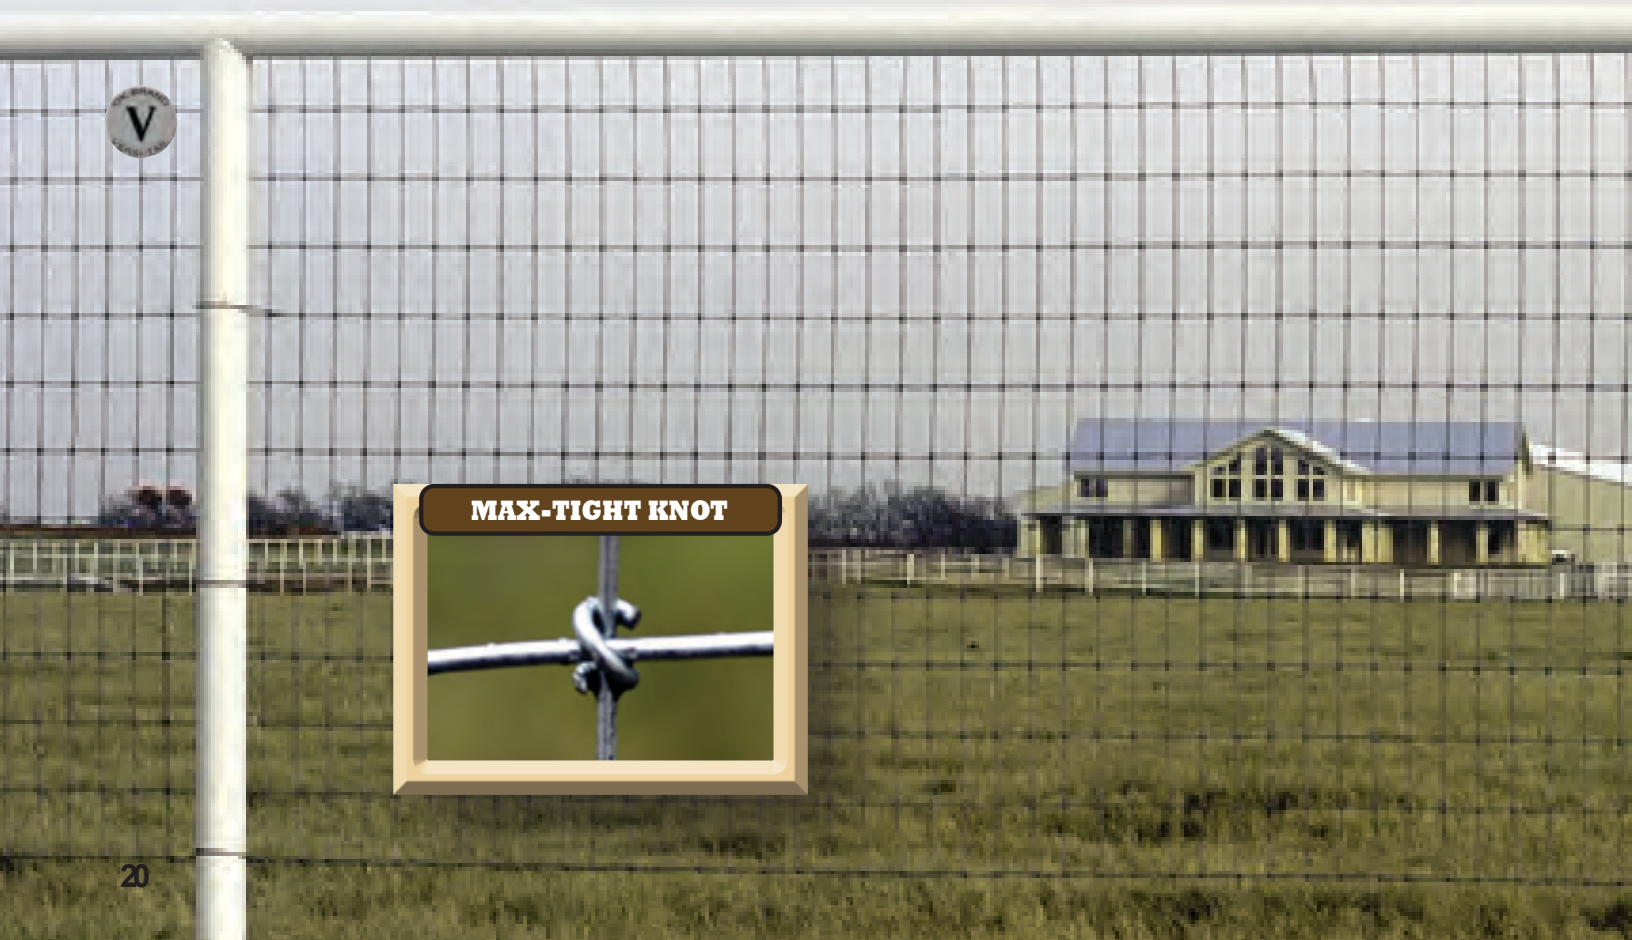

Max-Tight Horse Fence

MAX-TIGHT HORSE FENCE - CLASS I OR CLASS III ZINC COATING				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567048995	0489-9	3′	94	8
755567049008	0490-0	4′	122	8
755567049107	0491-0	4′	244	4
755567049343	0493-4	4′	348	3
755567049015	0490-1	5′	151	8
755567049114	0491-1	5′	296	4
755567049350	0493-5	5′	428	3
755567049022	0490-2	6′	179	8

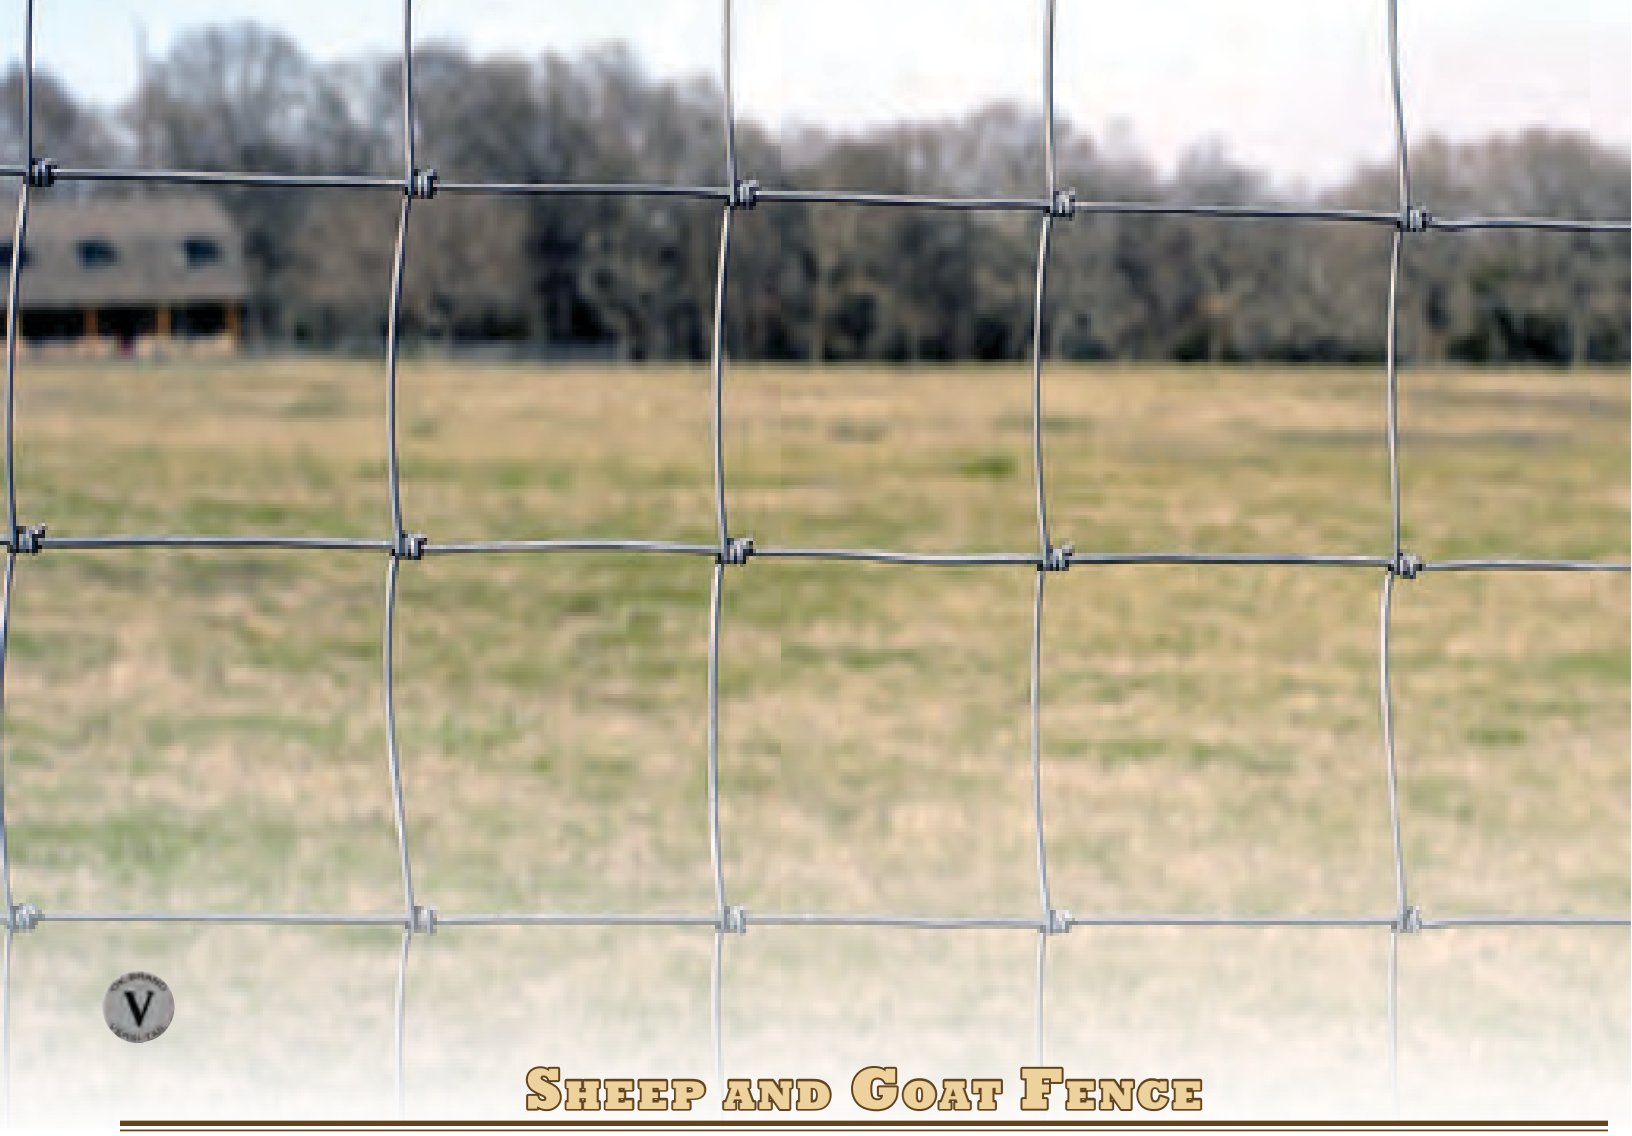

Sheep and Goat Fence

Need a field fence with a smaller and consistent spacing throughout to contain your smaller sheep and goats? OK Brand manufactures Sheep and Goat Fence with 4″ x 4″ spacing from top to bottom. Available with Hinge-Joint or Max-Tight Knots, this fence will confine your most stubborn animals.

PREMIUM SHEEP & GOAT FENCE - CLASS I ZINC COATING

PRODUCT	FENCE HEIGHT	SPACING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
4′	48″	4″ x 4″	12.5	10	330′	289	4	
5′	60″	4″ x 4″	12.5	10	330′	355	4	
6′	72″	4″ x 4″	12.5	10	330′	422	4	

COMMERCIAL SHEEP & GOAT FENCE - ZINC COATING

PRODUCT	FENCE HEIGHT	SPACING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
4′	48″	4″ x 4″	14	11	330′	193	9	

MAX-TIGHT SHEEP & GOAT FENCE - CLASS I ZINC COATING

PRODUCT	FENCE HEIGHT	SPACING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
3′	36″	4″ x 4″	12.5	10	330′	205	4	
4′	48″	4″ x 4″	12.5	10	330′	262	4	
5′	60″	4″ x 4″	12.5	10	330′	321	4	
6′	72″	4″ x 4″	12.5	10	330′	382	4	

PREMIUM SHEEP & GOAT FENCE - CLASS I ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567048902	0489-0	4′	289	4
755567048933	0489-3	5′	355	4
755567048971	0489-7	6′	422	4

COMMERCIAL SHEEP & GOAT FENCE - CLASS I ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567048889	0488-8	4′	193	9

MAX-TIGHT SHEEP & GOAT FENCE - CLASS I ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567049190	0491-9	3′	205	4
755567049206	0492-0	4′	262	4
755567049213	0492-1	5′	321	4
755567049220	0492-2	6′	382	4

Premium Game Fence

OK Brand Premium Game Fence is the cost-effective way to confine deer, elk, and other game animals. Our Premium Game Fence is manufactured using the Hinge-Joint Knot, which allows for easier installation over hilly or rough terrain. The Class I galvanized zinc coating ensures a long-lasting fence, and our 330′ rolls reduce the need for splicing.

PREMIUM GAME FENCE - CLASS I OR CLASS III ZINC COATING

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
8′	18	96″	6″	12.5	10	330′	350	6	
8′6″	19	102″	6″	12.5	10	330′	378	6	

PREMIUM GAME FENCE - CLASS I OR CLASS III ZINC COATING				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567049305	0493-0	8′	350	6
755567049329	0493-2	8′6″	378	6

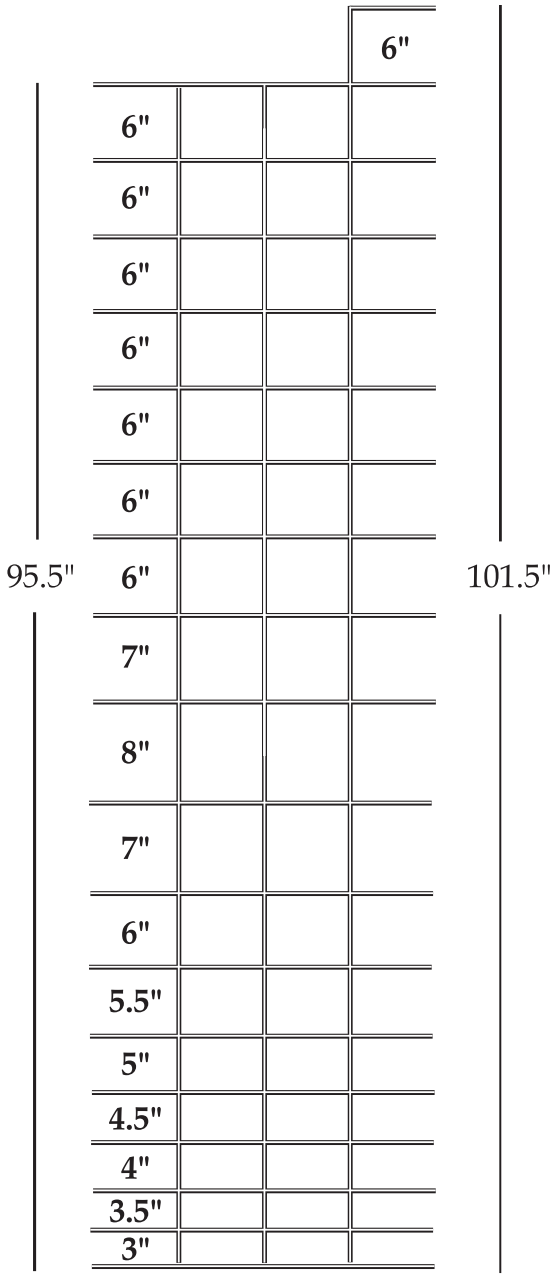

Max-Loc High-Tensile Fence

OK Brand Max-Loc is another great alternative for your fencing needs. This Class III High-Tensile Fencing offers you the strength and durability you have come to expect in all OK Brand products. Max-Loc Fencing uses fixed knot technology, originally developed in New Zealand for raising deer. This technology introduces a third wire to tie the continuous vertical and horizontal wires together. The fixed knot gives you maximum hold on the vertical and horizontal wires, locking them in place. The high tensile 12.5-gauge wire allows for minimal stretching during installation, with the Class III coating providing protection in any climate or temperature. Making installation even easier the Versi-Tail feature is added to all Max-Loc products. This unique feature allows for easier splicing of the rolls and anchoring to corner posts by adding a 12″ tail at the beginning of each roll and a 6″ tail at each end.

Available in game fence and field fence styles.

MAX-LOC HIGH-TENSILE FENCING - CLASS III ZINC COATING

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
949-6-12.5	9	49″	6″	12.5	12.5	330′	195	6	
1348-6-12.5	13	48″	6″	12.5	12.5	330′	252	6	
1561-6-12.5	15	61"	6"	12.5	12.5	330'	276	6	
1775-6-12.5	17	75"	6"	12.5	12.5	330'	350	6	
2096-6-12.5	20	96″	6″	12.5	12.5	330′	405	6	
949-12-12.5	9	49″	12″	12.5	12.5	330′	140	9	
949-12-12.5	9	49″	12″	12.5	12.5	660′	278	6	
1348-12-12.5	13	48″	12″	12.5	12.5	330′	178	9	
1348-12-12.5	13	48″	12″	12.5	12.5	660′	339	6	

MAX-LOC HIGH-TENSILE FENCING - CLASS III ZINC COATING				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLETS
755567014013	0140-1	949-6-12.5	195	6
755567014204	0142-0	1348-6-12.5	252	6
755567014556	0145-5	1561-6-12.5	276	6
755567014822	0148-2	1775-6-12.5	350	6
755567015140	0151-4	2096-6-12.5	405	6
755567017212	0172-1	949-12-12.5	140	9
755567016222	0162-2	949-12-12.5 660'	278	6
755567017274	0172-7	1348-12-12.5	178	9
755567017298	0172-9	1348-12-12.5 660'	339	6

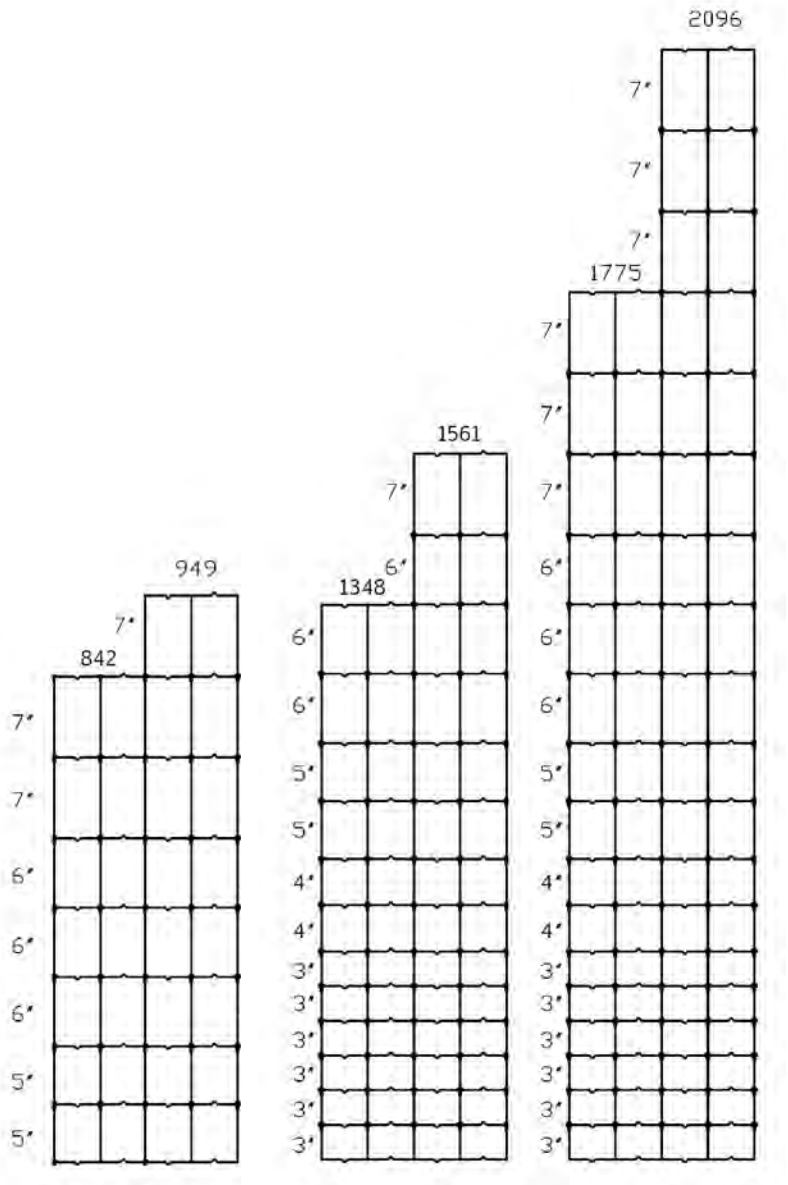

High-Tensile Barbed Wire

Made with high-carbon Class III galvanized wire, OK Brand High-Tensile Barbed Wire offers you another fencing alternative. The extra zinc coating provides protection in any climate or temperature. The 15.5-gauge wire allows for a light, easy-to-handle product, with the high-tensile strength eliminating the need for stretching during installation. With the wire placed on a non-collapsible reel, installation doesn't get much easier.

HIGH-TENSILE BARBED WIRE - 2-POINT

PRODUCT	ZINC COATING	BARB SPACING	STRAND WIRE GAUGE	BARB GAUGE	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
2-Pt.	Class III	5″	14	14	1,320′	56	27	
2-Pt.	Class III	5″	15.5	14	1,320′	42	27	

HIGH-TENSILE BARBED WIRE - 4-POINT

PRODUCT	ZINC COATING	BARB SPACING	STRAND WIRE GAUGE	BARB GAUGE	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
4-Pt.	Class III	5″	14	14	1,320′	67	27	
4-Pt.	Class III	3″	15.5	16.5	1,320′	50	27	
4-Pt.	Class III	5″	15.5	16.5	1,320′	44	27	

High-Tensile Field Fence

OK Brand High-Tensile Field Fence is manufactured with high-carbon Class III galvanized wire to give you strength as well as climate protection no matter where you are. Because it is designed with a high-tensile horizontal wire, minimal stretching on installation is required. Using our Hinge-Joint Knot allows the fencing to give under pressure and spring back into shape.

HIGH-TENSILE FIELD FENCE

PRODUCT	NO. HORIZ. WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
939-6-12.5	9	39″	6″	12.5	10.5	330′	177	9	
1047-6-12.5	10	47″	6″	12.5	10.5	330′	202	9	
939-6-14	9	39″	6″	14	12.5	330′	115	9	
1047-6-14	10	47″	6″	14	12.5	330′	131	9	
939-12-12.5	9	39″	12″	12.5	10.5	330′	135	9	
1047-12-12.5	10	47″	12″	12.5	10.5	330′	152	9	

High-Tensile Barbed Wire and Field Fence

HIGH-TENSILE BARBED WIRE - 2-POINT

BARCODE	ITEM#	PRODUCT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567011807	0118-0	2-Pt.	1,320	56	27
755567011500	0115-0	2-Pt.	1,320	42	27

HIGH-TENSILE BARBED WIRE - 4-POINT

BARCODE	ITEM#	PRODUCT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567011708	0117-0	4-Pt.	1,320	67	27
755567011609	0116-0	4-Pt.	1,320	44	27

HIGH-TENSILE FIELD FENCE

BARCODE	ITEM#	PRODUCT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567020816	0208-1	939-6-12.5	330	177	9
755567021219	0212-1	1047-6-12.5	330	202	9
755567020885	0208-8	939-6-14	330	115	9
755567021295	0212-9	1047-6-14	330	131	9
755567021035	0210-3	939-12-12.5	330	135	9
755567021448	0214-4	1047-12-12.5	330	152	9

Max-Tight High-Tensile Sheep & Goat

OK Brand Max-Tight High-Tensile Sheep & Goat is manufactured using high-carbon Class III galvanized wire providing you another fencing option. The class III zinc coating provides extra protection in any climate or temperature. The 4"x4" configuration from top to bottom combined with the Max-Tight knot allows you to safely keep your prized animals contained. The 12.5-gauge high tensile wire used throughout eliminates the need for excessive stretching during installation. Combined with the OK Brand Versi-Tail installation couldn't be easier.

MAX-TIGHT HIGH-TENSILE SHEEP & GOAT - CLASS III ZINC COATING

PRODUCT	FENCE HEIGHT	SPACING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
4'	48"	4" X 4"	12.5	12.5	330'	244	4	

Max-Tight High-Tensile Horse Fence

Just like our Premium Max-Tight Horse Fence, our High-Tensile Max-Tight Horse Fence is manufactured using the Max-Tight Horse Safe Knot. This square knot provides extra vertical strength to withstand impact from large animals. Continuous vertical and horizontal wires, wrapped in a horse-safe knot with a third wire, these feature along with the High-Tensile 12.5 gauge wire provides strength and rigidity as well as the safety needed for your prized animals.

MAX-TIGHT HIGH-TENSILE HORSE FENCE - CLASS III ZINC COATING

PRODUCT	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
4'	48"	4" X 2"	12.5	12.5	200'	230	4	
5'	60"	4" X 2"	12.5	12.5	200'	288	4	

MAX-TIGHT HIGH-TENSILE SHEEP & GOAT

BARCODE	ITEM#	PRODUCT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET
	0492-00	4' HIGH TENSILE SHEEP AND GOAT	330	244	4

MAX-TIGHT HIGH-TENSILE HORSE FENCE

BARCODE	ITEM#	PRODUCT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET
	0491-71	4' HIGH TENSILE HORSE FENCE	200'	230	4
	0491-11	5' HIGH TENSILE HORSE FENCE	200'	288	4

Welded Wire Fabric

From fencing a garden to fencing ostriches, this fence is easily installed because of the wire's ability to be cut and bent with minimum stress. Welded Wire can be fabricated to meet your specific needs and is durable and dependable for everyday use. Welded Wire works great for a temporary situation because it is easy to remove, re-roll, and store for later use.

WELDED WIRE FABRIC - 12.5-GAUGE

PRODUCT	SPACING	HEIGHT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
3′ x 50′	4″ x 2″	36″	50′	36	16	
4′ x 50′	4″ x 2″	48″	50′	48	16	
5′ x 50′	4″ x 2″	60″	50′	60	16	
6′ x 50′	4″ x 2″	72″	50′	70	16	
2′ x 100′	4″ x 2″	24″	100′	48	16	
3′ x 100′	4″ x 2″	36″	100′	72	8	
4′ x 100′	4″ x 2″	48″	100′	96	8	
5′ x 100′	4″ x 2″	60″	100′	119	8	
6′ x 100′	4″ x 2″	72″	100′	141	8	

WELDED WIRE FABRIC - 14-GAUGE

PRODUCT	SPACING	HEIGHT	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
3′ x 50′	4″ x 2″	36″	50′	24	16	
4′ x 50′	4″ x 2″	48″	50′	32	16	
5′ x 50′	4″ x 2″	60″	50′	40	16	
6′ x 50′	4″ x 2″	72″	50′	48	16	
2′ x 100′	4″ x 2″	24″	100′	32	18	
3′ x 100′	4″ x 2″	36″	100′	48	9	
4′ x 100′	4″ x 2″	48″	100′	63	9	
5′ x 100′	4″ x 2″	60″	100′	79	9	
6′ x 100′	4″ x 2″	72″	100′	92	9	

WELDED WIRE FABRIC - 12.5-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567050707	0507-0	3′ x 50′	36	16
755567050509	0505-0	4′ x 50′	48	16
755567050301	0503-0	5′ x 50′	60	16
755567050103	0501-0	6′ x 50′	70	16
755567050806	0508-0	2′ x 100′	48	16
755567050608	0506-0	3′ x 100′	72	8
755567050400	0504-0	4′ x 100′	96	8
755567050202	0502-0	5′ x 100′	119	8
755567050004	0500-0	6′ x 100′	141	8

WELDED WIRE FABRIC - 14-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567051704	0517-0	3′ x 50′	24	16
755567051506	0515-0	4′ x 50′	32	16
755567051308	0513-0	5′ x 50′	40	16
755567051100	0511-0	6′ x 50′	48	16
755567051155	0511-5	2′ x 100′	32	18
755567051605	0516-0	3′ x 100′	48	9
755567051407	0514-0	4′ x 100′	63	9
755567051209	0512-0	5′ x 100′	79	9
755567051001	0510-0	6′ x 100′	92	9

Fence Stays

OK Brand Fence Stays help maintain stability and uniformity in fencing when used with barbed wire or a combination of barbed wire and field fence. Available in 9.5-gauge Class I galvanized coated wire or an economical 10-gauge commercial grade. Fence stays will reduce fencing costs by allowing the use of fewer fence posts.

FENCE STAYS - CLASS I ZINC COATING

PRODUCT	STAY WIRE GAUGE	HEIGHT	APPROX. WT/ BUNDLES LBS.	STAYS PER BUNDLE	TAG COLOR
24″	9.5	24″	25	100	
28″	9.5	28″	29	100	
30″	9.5	30″	30	100	
32″	9.5	32″	32	100	
36″	9.5	36″	37	100	
42″	9.5	42″	43	100	
48″	9.5	48″	49	100	
52″	9.5	52″	52	100	

FENCE STAYS - COMMERCIAL ZINC COATING

PRODUCT	STAY WIRE GAUGE	HEIGHT	APPROX. WT/ BUNDLES LBS.	STAYS PER BUNDLE	TAG COLOR
30″	10	30″	27	100	
32″	10	32″	28	100	
36″	10	36″	32	100	
42″	10	42″	37	100	
48″	10	48″	42	100	
52″	10	52″	46	100	

Available in Class III on Request

Fence Stays

FENCE STAYS - CLASS I ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WT/ BUNDLES LBS.	STAYS PER BUNDLE
755567031058	0310-5	24″	25	100
755567031553	0315-5	28″	29	100
755567032017	0320-1	30″	30	100
755567033014	0330-1	32″	32	100
755567035018	0350-1	36″	37	100
755567038019	0380-1	42″	43	100
755567039016	0390-1	48″	49	100
755567039313	0393-1	52″	52	100

FENCE STAYS - COMMERCIAL ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WT/ BUNDLES LBS.	STAYS PER BUNDLE
755567032000	0320-0	30″	27	100
755567033007	0330-0	32″	28	100
755567035001	0350-0	36″	32	100
755567038002	0380-0	42″	37	100
755567039009	0390-0	48″	42	100
755567039306	0393-0	52″	46	100

Electric Fence Wire

OK Brand Electric Fence Wire is manufactured with an extremely strong, smooth wire to resist breakage over long distances. Our Electric Fence Wire comes in spools of 12.5, 14, and 17-gauge galvanized wire in quarter-mile and half-mile lengths. Electric Fence is ideal for added security on an existing fence or as a low-cost temporary or permanent fencing alternative.

ELECTRIC FENCE WIRE - 12.5-GAUGE

PRODUCT	LENGTH IN MILES	APPROX. WEIGHT LBS. PER BOX	ROLLS PER BOX	ROLLS PER PALLET	TAG COLOR
12.5-Ga. x 1/4 mile	1/4	80	2	64	

ELECTRIC FENCE WIRE - 14-GAUGE

PRODUCT	LENGTH IN MILES	APPROX. WEIGHT LBS. PER BOX	ROLLS PER BOX	ROLLS PER PALLET	TAG COLOR
14-Ga. x 1/4 mile	1/4	45	2	108	
14-Ga. x 1/2 mile	1/2	90	2	64	

ELECTRIC FENCE WIRE - 15.5-GAUGE

PRODUCT	LENGTH IN MILES	APPROX. WEIGHT LBS. PER BOX	ROLLS PER BOX	ROLLS PER PALLET	TAG COLOR
15.5-Ga. x 1/4 mile	1/4	45	2	108	

ELECTRIC FENCE WIRE - 17-GAUGE

PRODUCT	LENGTH IN MILES	APPROX. WEIGHT LBS. PER BOX	ROLLS PER BOX	ROLLS PER PALLET	TAG COLOR
17-Ga. x 1/4 mile	1/4	32	2	108	
17-Ga. x 1/2 mile	1/2	41	2	108	

HIGH TENSILE ELECTRIC FENCE - 12.5-GAUGE CLASS III

PRODUCT	LENGTH IN MILES	WEIGHT	ROLLS PER BUNDLE	TAG COLOR
High-Tensile 170,000 psi	3/4	100	5	
High-Tensile 200,000 psi	3/4	100	5	
High-Tensile 170,000 psi	3/8	50	5	
High-Tensile 200,000 psi	3/8	50	5	

Electric Fence Posts

Each spade is spot welded twice on our OK Brand Electric Fence Posts to provide additional strength. Electric Fence Posts are available in painted or commercial galvanized finish and the choice of either smooth or profiled.

ELECTRIC FENCE POSTS - PROFILED PAINTED

PRODUCT	POST DIAMETER	LENGTH	APPROX. WEIGHT LBS. PER BOX	POSTS PER BUNDLE	POSTS PER PALLET
5/6" x 4' Posts	5/16"	4'	1.125	25	2,000
3/8" x 4' Posts	3/8"	4'	1.5	25	2,000
7/16" x 4' Posts	7/16"	4'	1.63	20	1,000

ELECTRIC FENCE WIRE - 12.5-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS. PER BOX	ROLLS PER PALLET
755567026504	0265-0	12.5-Ga. x 1/4 mile	80	64

ELECTRIC FENCE WIRE - 14-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS. PER BOX	ROLLS PER PALLET
755567026603	0266-0	14-Ga. x 1/4 mile	45	108
755567026702	0267-0	14-Ga. x 1/2 mile	90	64

ELECTRIC FENCE WIRE - 15.5-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS. PER BOX	ROLLS PER PALLET
755567026757	0267-5	15.5-Ga. x 1/4 mile	32	108

ELECTRIC FENCE WIRE - 17-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS. PER BOX	ROLLS PER PALLET
755567026801	0268-0	17-Ga. x 1/4 mile	42	216
755567026900	0269-0	17-Ga. x 1/2 mile	41	216

HIGH-TENSILE ELECTRIC FENCE - 12.5-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS. PER BOX	ROLLS PER PALLET
755567026306	0263-0	High-Tensile 170,000 psi	100	5
755567026351	0263-5	High-Tensile 200,000 psi	100	5
755567026313	0263-1	High-Tensile 170,000 psi	50	5
755567026320	0263-2	High-Tensile 200,000 psi	50	5

ELECTRIC FENCE POSTS - PROFILED PAINTED

BARCODE	ITEM#	PRODUCT	LENGTH	POSTS PER BUNDLE
755567025354	0253-5	5/6" x 4' Posts	4'	25
755567025606	0256-0	3/8" x 4' Posts	4'	25
755567025415	0254-1	7/16" x 4' Posts	4'	20

Catchweight Coils

OK Brand manufactures a wide assortment of catchweight coils for numerous applications. Available in either black annealed or galvanized, in several different gauges, so you can be sure to find the coil to meet your needs. Whether on the farm or in the shop, OK Brand's Catchweight Coil can handle the job.

CATCHWEIGHT COILS - BLACK ANNEALED

PRODUCT	WIRE GAUGE	COIL LENGTH	APPROX. WEIGHT LBS.	COILS PER PALLET	TAG COLOR
9-Ga. Coil	9	170′	10	1	
12-Ga. Coil	12	340′	10	1	
14-Ga. Coil	14	584′	10	1	
8-Ga. Coil	8	1,425′	100	1	
9-Ga. Coil	9	1,701′	100	1	
10-Ga. Coil	10	2,053′	100	1	
11-Ga. Coil	11	2,577′	100	1	
12-Ga. Coil	12	3,400′	100	1	
12.5-Ga. Coil	12.5	3,817′	100	1	
14-Ga. Coil	14	5,846′	100	1	

CATCHWEIGHT COILS - GALVANIZED COATING

PRODUCT	WIRE GAUGE	COIL LENGTH	APPROX. WEIGHT LBS.	COILS PER PALLET	TAG COLOR
9-Ga. Coil	9	170′	10	1	
10-Ga. Coil	10	205′	10	1	
11-Ga. Coil	11	257′	10	1	
12-Ga. Coil	12	340′	10	1	
14-Ga. Coil	14	584′	10	1	
17-Ga. Coil	17	1,285′	10	1	
9-Ga. Coil	9	425′	25	1	
9-Ga. Coil	9	1,701′	100	1	
10-Ga. Coil	10	2,053′	100	1	
11-Ga. Coil	11	2,577′	100	1	
12-Ga. Coil	12	3,400′	100	1	
14-Ga. Coil	14	5,846′	100	1	
17-Ga. Coil	17	12,850′	100	1	

Rebar Tie Wire

OK Brand Rebar Tie Wire is strong enough to securely tie rebar, but soft annealed for easy twisting. Rebar Tie Wire is available in 16.5-gauge black wire. Coils are adapted to fit standard dispensing reels. Each coil weighs approximately three-and-a-half pounds. The coils are packed 20 coils to a box, with 48 boxes to a pallet.

CATCHWEIGHT COILS - BLACK ANNEALED

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	COILS PER PALLET
755567058604	0586-0	9-Ga. Coil	10	1
755567059205	0592-0	12-Ga. Coil	10	1
755567060201	0602-0	14-Ga.-Coil	10	1
755567058581	0585-8	8-Ga. Coil	100	1
755567058802	0588-0	9-Ga. Coil	100	1
755567059144	0591-4	10-Ga. Coil	100	1
755567059199	0591-9	11-Ga. Coil	100	1
755567059304	0593-0	12-Ga. Coil	100	1
755567059809	0598-0	12.5-Ga. Coil	100	1
755567060300	0603-0	14-Ga. Coil	100	1

CATCHWEIGHT COILS - GALVANIZED COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	COILS PER PALLET
755567058901	0589-0	9-Ga. Coil	10	1
755567059137	0591-3	10-Ga. Coil	10	1
755567059168	0591-6	11-Ga. Coil	10	1
755567059403	0594-0	12-Ga. Coil	10	1
755567060409	0604-0	14-Ga. Coil	10	1
755567060553	0605-5	17-Ga. Coil	10	1
755567059007	0590-0	9-Ga. Coil	25	1
755567059106	0591-0	9-Ga. Coil	100	1
755567059151	0591-5	10-Ga. Coil	100	1
755567059182	0591-8	11-Ga. Coil	100	1
755567059502	0595-0	12-Ga. Coil	100	1
755567060508	0605-0	14-Ga. Coil	100	1
755567060591	0605-9	17-Ga. Coil	100	1

REBAR TIE WIRE - 16.5-GAUGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS. PER BOX	COILS PER BOX
755567060652	0606-5	Rebar Tie Wire - Black	70	20

T-Posts

High quality T-Post are sourced from various T-Post manufactures, with sturdy anchor plates to assure stability in all soil types. In-stock lengths include 6', 6'6", and 10'.

T-Posts Driver

Complement your line by adding one of our economical 16-pound T-Post Drivers, manufactured to stand up to the stresses of a long day of fence building.

T-Posts Clips

Our T-Post Clips were designed so that the ends of the fasteners provide tension when installed, keeping the line wire tight against the post. Just a half-turn around the wire is all it takes for easy installation. These high-quality clips are universal, fitting 1.25 and 1.33-pound weight T-Posts. They are packaged in quantities of 1,000 clips per bag and sub-packaged in 20 bags of 50 clips. Pallets contain 100 bags, which weigh approximately 21 lbs. each.

Fence Staples

No matter what OK Brand product you need to securely fasten to wood posts, OK Brand barbed fence staples will do the job. OK Brand staples are slice cut and have plenty of holding power. The sharp points make them easy to drive into the wood and the barbs hold them securely in place. Made with high quality commercial and Class 3 galvanized wire coatings, this double barbed 8 gauge staple is made to do the job right the first time and for a long time. Available in 8# and 50# buckets.

Pipe Clip / EZ Twist

OK Brand Pipe Clips and EZ Twists are manufactured using a Class III, 11-Gauge galvanized wire. The clips slide around a post and fence wire and then the tails are placed in a drill chuck that twists the wire securing it to the post.

Panel Hinge

Looking for a quick and easy, yet durable solution to splicing wire livestock panels you are at the right place. This hinge/connector provides you the durability and reliability that twine and soft wire can't, with top to bottom strength eliminating a space for animals to squeeze through. Whether you are using it as a wire panel gate hinge or splicing multiple panels, the panel hinge makes the job easy while knowing it is done right.

Spreader Bar

The OK Brand Spreader Bar has been uniquely designed to assist customers in unloading 20' panels without causing damage. The spreader bar easily attaches to any forklift. The use of our spreader bar has been proven an efficient method for unloading and can reduce damage to the product.

T-POST 1.25 & 1.33-POUND

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	POSTS/ BUNDLE
755567020600	0276-0	Green 6' 1.25	7.5	200
755567027631	0276-3	Green 6' 1.33	7.98	200
755567027655	0276-5	Green 6.5' 1.25	8.13	200
755567027686	0276-8	Green 6.5' 1.33	7.5	200
755567028508	0285-0	Green 10' 1.33	13.3	200

T-POST CLIPS

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	QTY/PKG
755567030709	0307-0	T-Post Clips	18	1000

T-POST DRIVER

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	QTY/PKG
755567830002	8300-0	T-Post Driver	16	1

FENCE STAPLES

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	QTY/PKG
755567009507	0095-0	BRB Staple 1" 8GA Class III 8#	8	6
755567009514	0095-1	BRB Staple 1" 8GA Class III 50#	50	1
755567009606	0096-0	BRB Staple 1.25" 8GA Class III 8#	8	6
755567009613	0096-1	BRB Staple 1.50" 8GA Class III 8#	8	6
755567009620	0096-2	BRB Staple 1.75" 8GA Class III 8#	8	6
755567009637	0096-3	BRB Staple 2.00" 8GA Class III 8#	8	6
755567009644	0096-4	BRB Staple 2.50" 8GA Class III 8#	8	6
755567009651	0096-5	BRB Staple 1.25" 8GA Class III 50#	50	1
755567009668	0096-6	BRB Staple 1.50" 8GA Class III 50#	50	1
755567009675	0096-7	BRB Staple 1.75" 8GA Class III 50#	50	1
755567009682	0096-8	BRB Staple 2.00" 8GA Class III 50#	50	1
755567009699	0096-9	BRB Staple 2.50" 8GA Class III 50#	50	1

PANEL HINGE

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	POSTS/ BUNDLE
755567030952	0309-5	34"	7	25
755567030976	0309-7	48"	10	25
755567030969	0309-6	60"	12.5	25

PIPE CLIP / EZ TWIST

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	QTY/ PKG
755567009316	0093.1	2 3/8" Pipe Clip	19	500
755567009330	0093-3	3" Pipe Clip	22	500
755567009354	0093-5	3.5" Pipe Clip	24	500
755567009378	0093-7	EZ Twist T-Post Clip	26	1000

Baler Wire

OK Brand Premium Baler Wire is manufactured from the highest quality 14.5-gauge annealed wire and meets ASAE standards. Baler Wire is packaged in rolls of minimum 6,500 linear feet. OK Brand Premium Baler Wire is built for dependability, from the quality of the wire to the strength of the box. A well-maintained level winding system and high grade lubricants allow for a tangle-free payoff and rust resistant wire. Banded with a nylon tape and the starting end marked, this quality wire is placed in a specially designed wax-coated box. The wax-coating prevents the wire's lubricant from bleeding through, which helps maintain the boxes' structural shape and durability. A perforated center knock-out is placed and sized for an optimum payoff. The box dimensions are designed to accommodate most balers.

BALER WIRE				
BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	QTY PER BOX
755567060683	0606-8	14.5-Ga. - 6500'	100	1

Welded Wire Reinforcement

With time and money savings advantages, reduced labor cost, faster placement and increased production, OK Brand Welded Wire Reinforcement is your concrete reinforcement solution.

WELDED WIRE REINFORCEMENT						
PRODUCT	WIRE GAUGE	ROLL HEIGHT	ROLL LENGTH	SPACING	APPROX. WEIGHT	ROLLS PER BUNDLE
6 x 6 x 6 x 6	6	5′	150′	6″	310	8
6 x 6 x 10 x 10	10	5′	50′	6″	50	22
6 x 6 x 10 x 10	10	5′	150′	6″	150	18

Sheets and Other Sizes Available

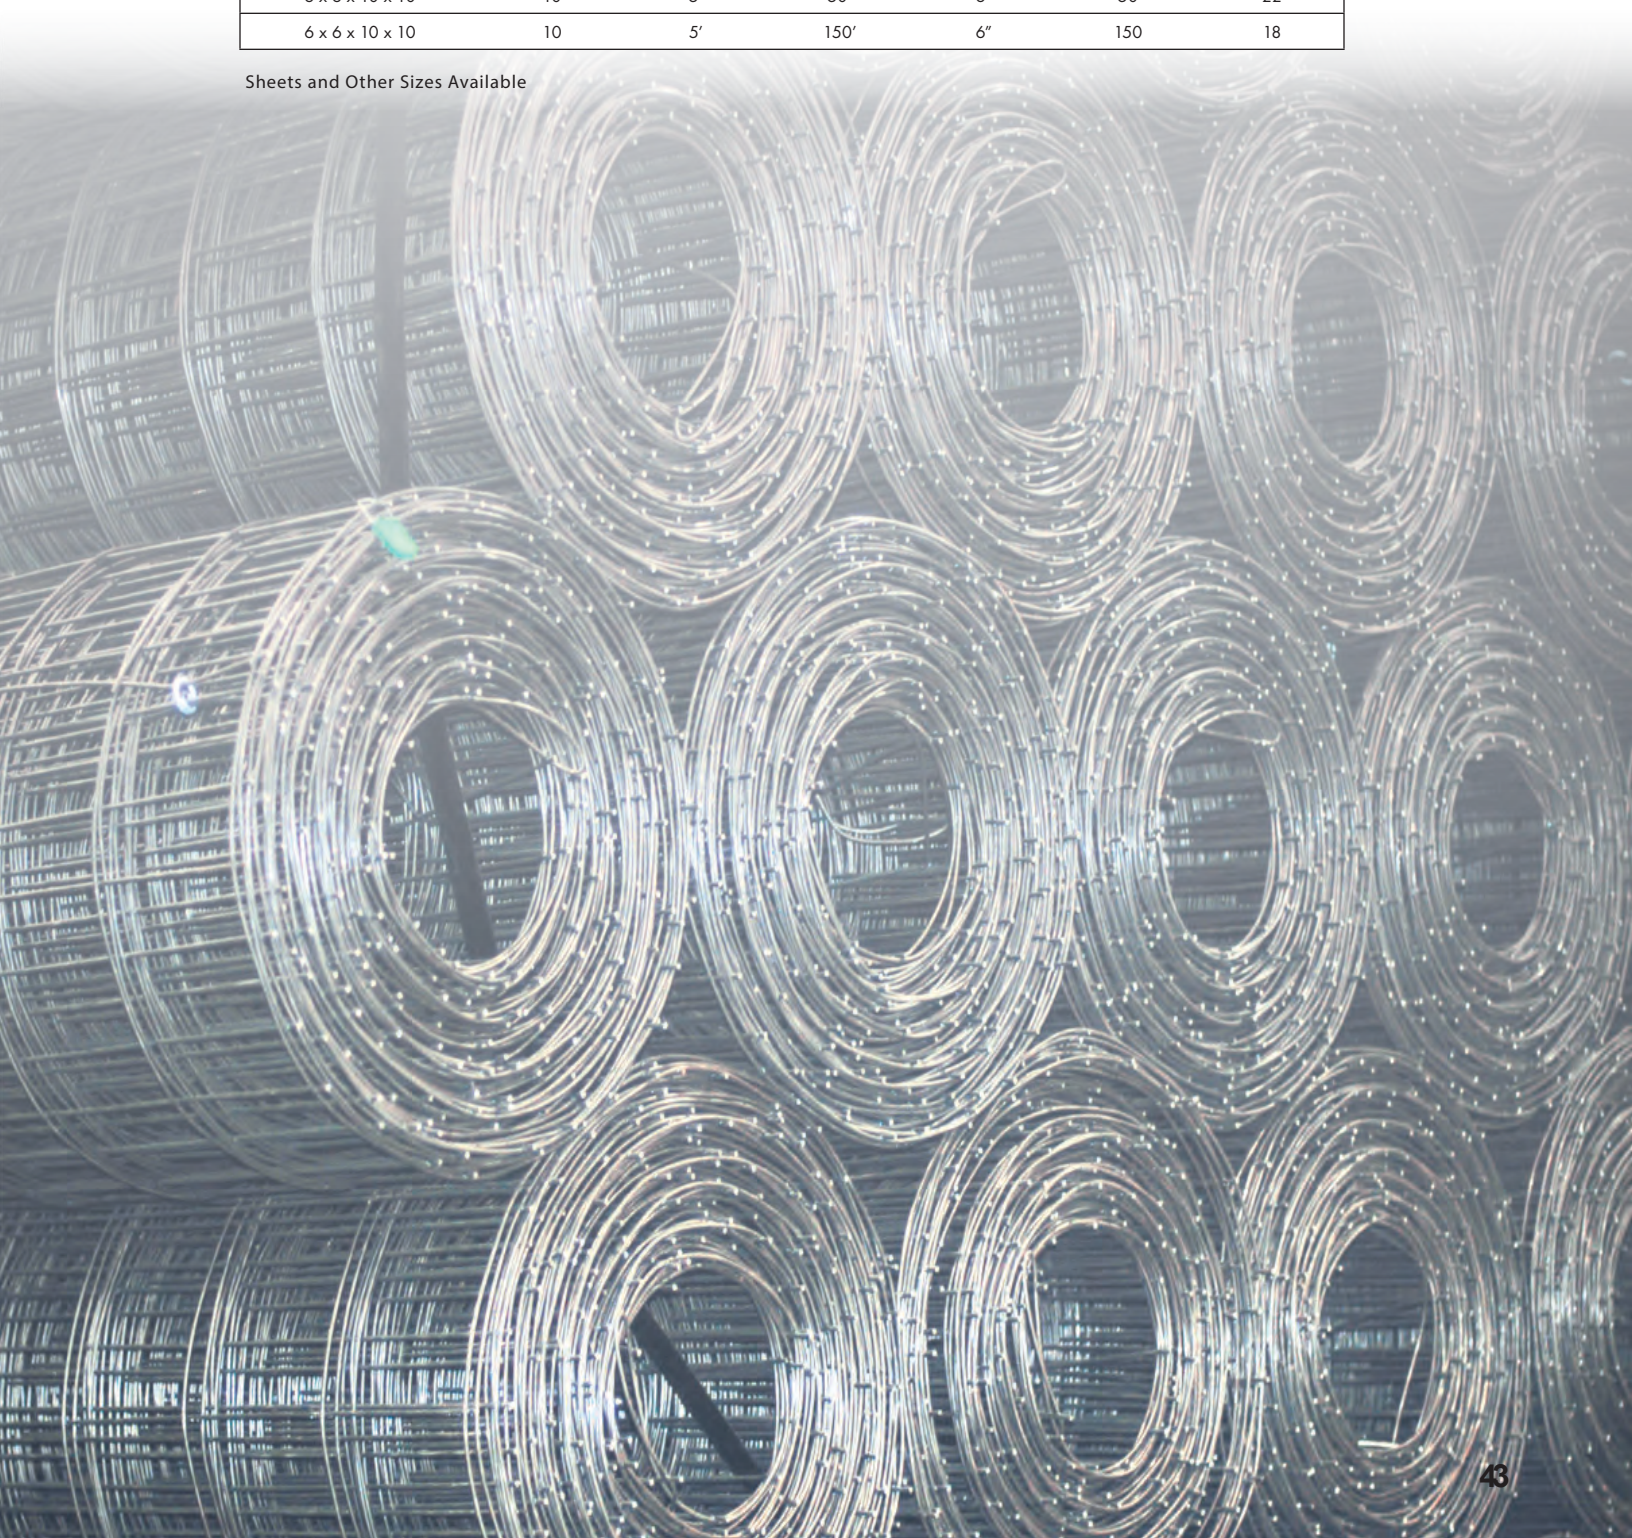

Fence Calculation Guide

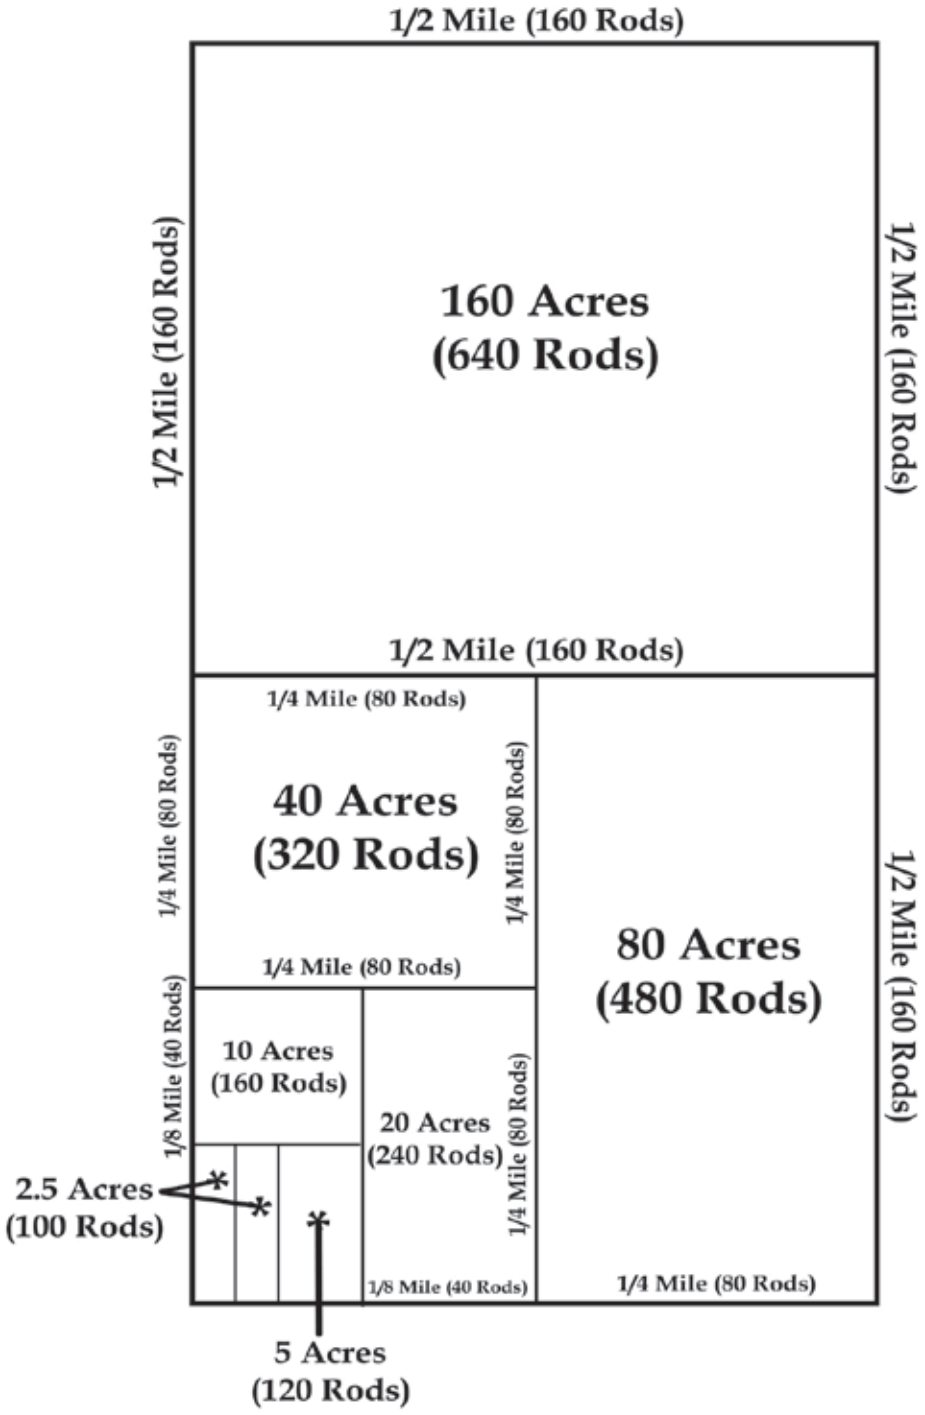

Barbed Wire
80 Rods (1,320 ft.) per Roll

Field Fence
20 Rods (330 ft.) per Roll

1 Rod = 16.5 ft.
1/4 Mile = 1,320 ft. (80 Rods)
1/2 Mile = 2,640 ft. (160 Rods)
1 Mile = 5,280 ft. (320 Rods)
1 Acre = 43,560 sq. ft.

AMOUNT OF FENCE NEEDED

Use end and corner posts as required. Stretcher posts should be used at approximately 20-rod intervals for permanent farm fences. Subtract one line for every stretcher post to be used.

RECTANGULAR FIELD				
ACRES	FIELD LENGTH	FIELD WIDTH	FENCE REQUIRED	NO. OF STEEL LINE POSTS REQUIRED
	RODS	RODS	RODS	4-CORNER FIELD
1	16	10	52	48
1	20	8	56	52
2.5	40	10	100	96
4	32	20	104	100
5	40	20	120	116
6	60	16	152	148
7	80	14	188	184
8	80	16	192	188
9	80	18	196	192
10	50	32	164	160
20	100	32	264	260
30	80	60	280	276
40	100	64	328	324
50	100	80	360	356
60	120	80	400	396
70	160	70	460	456
80	128	100	456	452
100	160	100	520	516
120	192	100	584	580
140	280	80	720	716
160	320	80	800	796
320	400	128	1,056	1,052
640	400	256	1,312	1,308

SQUARE FIELD					
ACRES	FIELD LENGTH			FENCE REQUIRED	NO. OF STEEL LINE POSTS REQUIRED
	RODS	FEET	INCHES	RODS	4-CORNER FIELD
1	12	10	9	51	47
2	17	14	8	72	68
3	21	15		88	84
4	25	4	11	101	97
5	28	4	8	113	109
6	30	16	3	124	120
7	33	7	8	134	130
8	35	12	10	143	139
9	37	15	8	152	148
10	40			160	156
20	56	9	5	227	223
30	69	4	8	227	273
40	80			320	316
50	89	7	4	358	354
60	97	16	2	392	388
70	105	13	8	424	420
80	113	2	3	453	449
100	126	8	1	506	502
120	138	9	4	554	550
140	149	11		559	595
150	160			640	636
320	226	4	7	905	901
640	320			1,280	1,276

Wire Information

Steel wire longevity depends on the type and thickness of protective coating around the wire. Zinc is commonly used to cover (galvanize) steel wire to protect it from rusting. There are several ways of applying zinc to steel wire, and some are claimed to be superior to others. However, results of testing by the American Society of Testing and Materials (ASTM) show no practical difference among galvanization methods.

Zinc coatings are measured in ounces of zinc per square foot of wire surface. The more zinc per square foot, the more years of wire use before rusting starts. The ASTM has established "classes" of zinc coatings for steel wire based on the number of years that galvanizing delays wire rusting under different climate conditions (Table 1). Class I has the lightest zinc coating and Class III has the heaviest. Machinery, livestock, and fire can damage the zinc coating, which results in wire that rusts sooner than undamaged wire. Steel wire can have less than a Class I coating. This is often referred to as "regular" galvanizing. Many local dealers stock steel wire with either regular or Class I coating.

	DRY CLIMATE		HUMID CLIMATE		COASTAL AND INDUSTRIAL CLIMATE	
WIRE SIZE (GA.)	CLASS I	CLASS III	CLASS I	CLASS III	CLASS I	CLASS III
9	15	30	8	13	3	6
11	11	30	6	13	2	6
12.5	11	30	6	13	2	6
14.5	7	23	5	10	1.5	4.5

Table 1. Approximate years of protection given steel wire by Class I and Class III galvanizing.
Virginia Polytechnic Institute and State University

Fencing Materials

Good fencing protects and confines valuable livestock by presenting barriers to restrict animal movement. Barriers can be physical, psychological, or a combination of both. Physical barriers consist of enough materials of sufficient strength to prevent or discourage animals from going over, under, or through fences. Psychological barriers discourage animals from challenging a physical barrier of inferior strength. Traditional livestock fencing materials have included barbed, woven, mesh, and electrified wire or combinations of these materials. Board fences have also been popular. These conventional materials are still widely used and make excellent fences if properly constructed. However, new materials such as high-tensile wire should also be considered when selecting fencing types. The type of fencing needed for livestock confinement depends on several factors, including animal species, age, breed, and production system. Beef cattle on a controlled grazing system have different fencing needs than horses on recreational pasture. Permanent boundary or division fences require different fencing materials than fences for temporary paddocks. Fencing type and materials influence the cost, lifespan, and function of the fencing system.

Cattle

Barbed wire and woven-wire fences have traditionally been used for cattle. Four-strand or five-strand barbed wire fences are adequate for cattle. Heavyweight and extra-heavyweight woven-wire fences with one or more strands of barbed wire above the fence are excellent for cattle. Fence height should be at least 39 inches. Heavy wire panel fences are highly recommended for cattle-handling facilities. Fence height should be at least 60 inches to prevent escape. Fences should also be clearly visible to reduce stress on the animal and to enhance movement through the facility.

Sheep and Goats

Barbed wire fences have typically been used for sheep and goats. However, these fences are not recommended for sheep, since barbs pull the fleece. Furthermore, barbed wire fences do not effectively confine goats if moderate grazing pressure is applied to the fenced-in area. Heavyweight or extra-heavyweight woven-wire fences are excellent for non horned sheep and goats. Fence height should be at least 39 inches to prevent animals from climbing over the fence, and may need to be higher depending on the breed to be confined. Mesh wire fences also make excellent fences for non-horned sheep and goats. Temporary fencing is not recommended for sheep or goats, since they can easily escape.

Swine

Barbed (standard and suspension) wire and cable fences are not effective for swine confinement. Woven-wire fences with one or more strands of barbed wire (placed along the ground to discourage rooting) provide good hog control. Medium and heavyweight woven-wire fences with small openings are excellent for restraining swine. Maximum fence height should be 54 inches. Fences built close to the ground prevent hogs from escaping by rooting underneath the fence.

Horses

Visibility is the most important characteristic of horse fencing. Poorly visible fences such as high-tensile and barbed wire fences should not be used with horses; the animals could incur severe injuries (e.g., deep lacerations or broken bones) if they become entangled in fence wires. Max-Tight Horse Fence and OK Brand Horse Panels are highly recommended for horses. Woven-wire fence with openings of 4 inches or more should not be used, since legs can become trapped in the openings. Woven-wire fencing with openings less than 4 inches are suitable for horses if a single 1-inch-by-6-inch board is placed at the top of the fence to increase visibility.

IT'S NOT JUST THE BRAND, IT'S THE PEOPLE BEHIND THE BRAND

A warranty is only as good as the company standing behind it. OK BRAND Companies don't just stand behind our words. We stand behind all our products.

Our production teams pride themselves on providing a Premium Fencing Product should you experience any defects in materials and workmanship beyond normal wear, tear, abuse and/or misuse let us know and give us the chance to make it right.

Prompt and proper notification should be given to your fencing supplier of any defective product or claim, or contact us directly at 800-654-4164.

We appreciate you choosing OK BRAND FENCING PRODUCTS, and we want to guarantee you made the right choice.

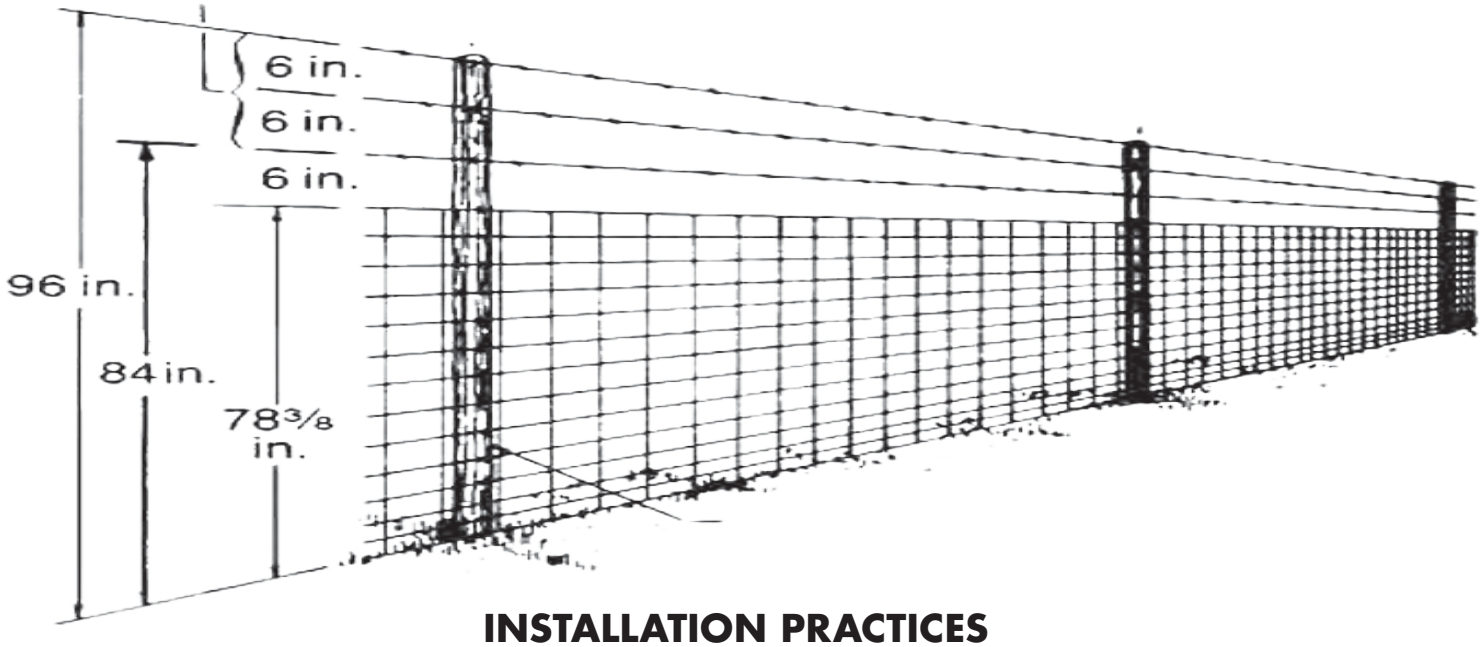

INSTALLATION PRACTICES

Oklahoma / Iowa Steel and Wire companies trust our products will perform well with common sense installation methods, however, we recommend and endorse the USDA Natural Resources Conservation Service (NRCS) guidelines.
These guidelines can be found at https://www.nrcs.usda.gov or following the link https://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs144p2_016391.pdf

ALWAYS USE PROPER PPE AND TOOLS WHEN INSTALLING YOUR OK BRAND FENCING

OKBRAND.COM

Important Telephone Numbers

Oklahoma Steel & Wire
Customer Service 580-795-7311

Iowa Steel & Wire
Customer Service 641-954-4695

Inside Sales
Trevor Raper 580-677-6111
J.W. Hale 580-795-6006
Bradley Burchfield 580-795-6013

Eastern Sales
Ryan Jones 580-795-6076
Ryan Hall 580-795-6087

Western Sales
Josh Eppler 580-795-6074

Midwestern Sales
Tony McDermott 580-795-6004

Texas Sales
Donnie O'Malley 580-795-6012

Iowa Steel and Wire
1500 West Van Buren
Centerville, Iowa 52544
1-800-325-5118

Oklahoma Steel and Wire
1042 South 1st Street
Madill, Oklahoma 73446
1-800-654-4164

www.okbrand.com